


DESCRIPTION : 2.54mm PITCH, EJECTOR HEADER, DOUBLE ROW,
RIGHT ANGLE

PART NO: P9904-XX-13L1
XX=NO. OF CONTACTS(06-64)

RoHS



PHYSICAL DATA

INSULATION	:	
MATERIAL	:	PBT
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK
CONTACT	:	
MATERIAL	:	COPPER ALLOY
SOLDER TAILS	:	GOLD PLATING
PACKAGING TYPE	:	STANDARD

ELECTRICAL DATA

CURRENT RATING	:	3A
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	550V AC/MIN
CONTACT RESISTANCE	:	20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-40°C TO +105°C
-------------------	---	-----------------

NOTE:

06P-18P WITHOUT SLOT "A" AND "B"

20P-58P WITHOUT SLOT "A" AND WITH SLOT "B"




60P-64P WITH SLOT "A" AND "B"




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH, EJECTOR HEADER, DOUBLE ROW,
RIGHT ANGLE

PART NO: P9904-XX-13L1
XX=NO. OF CONTACTS(06-64)

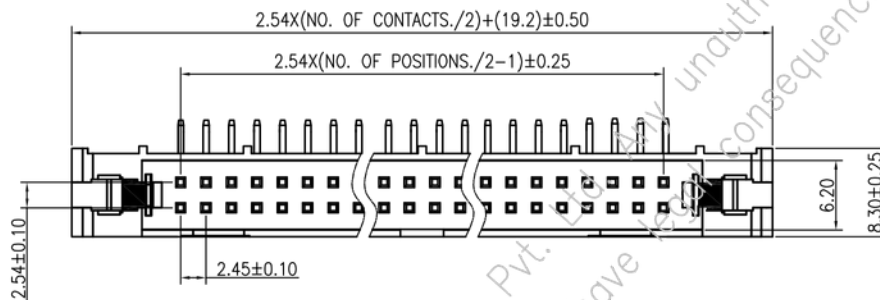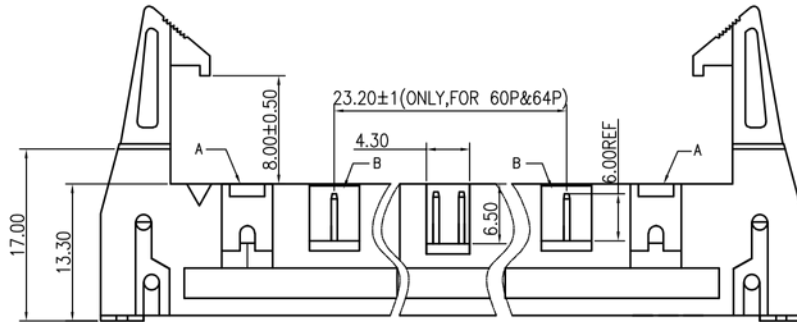

MATES WITH
P9403IDS

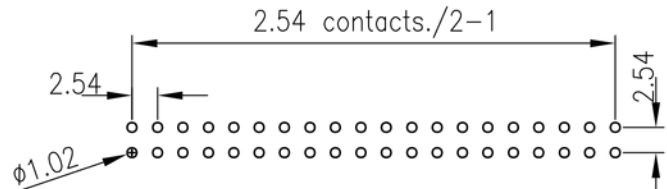

RECOMMENDED P.C.B. LAYOUT
(PCB TOLERANCE ± 0.05)

ORDERING INFORMATION

P9904-XX-13L1

NO OF CONTACTS

(06,08,10,12,14,16,18,20,24,26,30,34,40,50,60&64)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.35 mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in