




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH, EJECTOR HEADER, DOUBLE ROW,
RIGHT ANGLE

PART NO: P9904-XX-13L1
XX=NO. OF CONTACTS(06-64)

RoHS

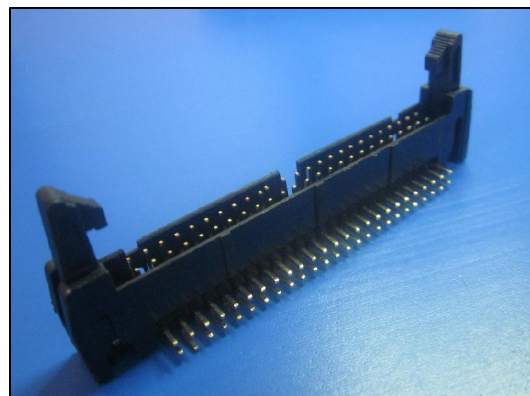

PHYSICAL DATA

INSULATION

MATERIAL : PBT
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : COPPER ALLOY
SOLDER TAILS : GOLD PLATING
PACKAGING TYPE : STANDARD

ELECTRICAL DATA

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 550V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C

NOTE:

06P-18P WITHOUT SLOT "A" AND "B"

20P-58P WITHOUT SLOT "A" AND WITH SLOT "B"





60P-64P WITH SLOT "A" AND "B"



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH, EJECTOR HEADER, DOUBLE ROW, RIGHT ANGLE

PART NO: P9904-XX-13L1
XX=NO. OF CONTACTS(06-64)

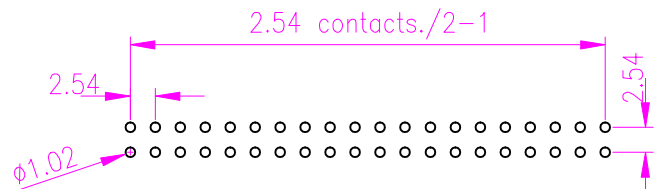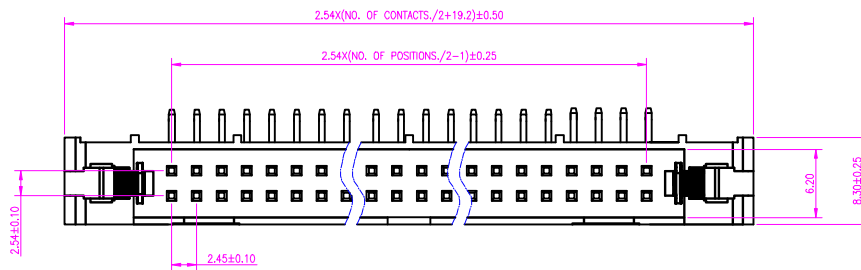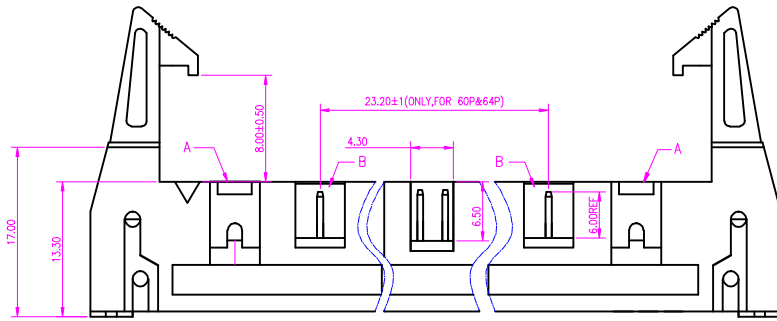

RECOMMENDED P.C.B. LAYOUT
(PCB TOLERANCE ±0.05)

MATES WITH
P9403IDS

ORDERING INFORMATION


P9904-XX-13L1

NO OF CONTACTS

(06,08,10,12,14,16,18,20,24,26,30,34,40,50,60&64)

A1	TOLERANCE UPDATED	VENILA	10.06.2015		
A	ORIGINAL	SACHIN	03.08.2004		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>

protectron@protectron.in