



DESCRIPTION : 6.3x32, CERAMIC BODY FAST ACTING FUSE

PART NO: PAFC In



RATED VOLTAGE	:	250 V
BREAKING CAPACITY	:	35 A OR 10 In WHICHEVER IS GREATER WHEN TESTED WITH AC CURRENT
CAP	:	BRASS, Ni PLATED
BODY	:	CERAMIC
OPERATING TEMPERATURE	:	-55°C TO +125°C

MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-


TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (250V),
BREAKING CAPACITY (H) & COMPANY'S IDENTIFICATION

NOMINAL CURRENT (In)	2.1 In MAX.	2.75 In		4 In		10 In MAX.
		MIN.	MAX.	MIN.	MAX.	
100 mA-4A	60 min	70 mSec	5 Sec	10 mSec	150 mSec	10 mSec
5A-35A	60 min	150mSec	2 Sec	25 mSec	200 mSec	20 mSec




DESCRIPTION : 6.3x32, CERAMIC BODY FAST ACTING FUSE

PART NO: PAFC In

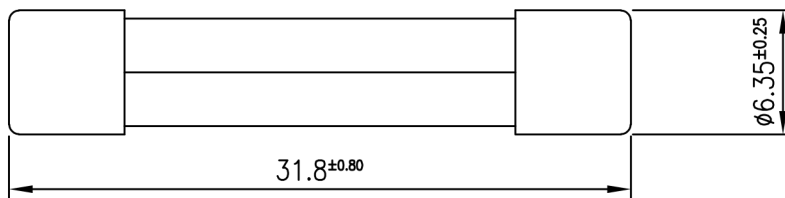

NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)	NOMINAL MELTING I^2t (A ² sec)
100 mA	6000	--
125 mA	5500	--
150 mA	5000	--
160 mA	5000	--
200 mA	5000	--
250 mA	3500	--
300 mA	3000	--
315 mA	3000	--
350 mA	3000	--
400 mA	3000	--
500 mA	3000	0.1
630 mA	2500	0.2
750 mA	2200	--
800 mA	2200	0.2
1.0 A	1900	0.4
1.25 A	1600	1.5
1.5 A	1300	--
1.6 A	1300	1.0
2.0 A	1000	3.2
2.5 A	700	4.2
3.0 A	600	--
3.15 A	600	10.0
3.5 A	600	--
4.0 A	550	15.0

5.0 A	500	33.0
6.3 A	450	49.0
7.0 A	450	--
7.5 A	450	--
8.0 A	400	98.0
10.0 A	350	178.0
12.0 A	300	715.49
12.5 A to 35.0 A	250	--

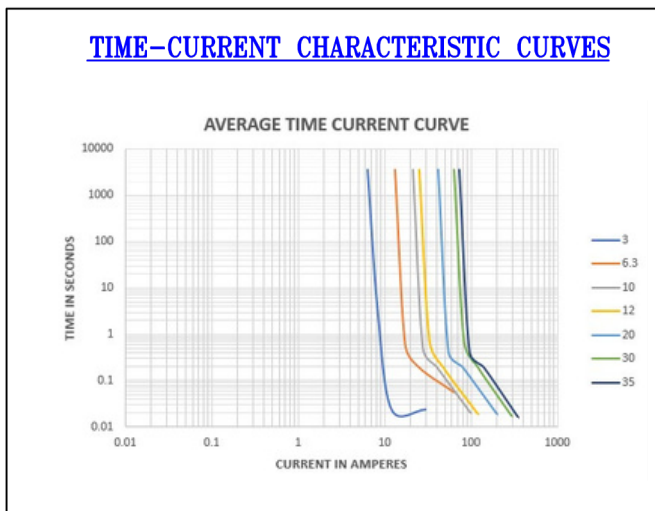

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.1\text{mm}$
 $\pm 0.2'$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.