

DESCRIPTION : Ø2.0mm DC POWER JACK,WITH 3 TERMINALS S/T
PANEL MOUNT WATER PROOF.

PART NO: PDCJ11-02A

RoHS



PHYSICAL DATA

07	LOCTITE SUPERFLEX SEALIENT	—	ACETOXY SILICONE	—
06	COVER	01	PF	—
05	CONTACT	01	BRASS	Cu-Sn
04	PIN	01	H59 BRASS	Ni
03	SPRING	01	65Mn STEEL	Cu-Sn
02	FLAT PIECE	01	H62 BRASS	Cu-Sn
01	HOUSING	01	ABS/PBT/PA66	—
NO	DESCRIPTION	QTY	MATERIAL	PLATING

ELECTRICAL DATA

CURRENT RATING	:	5A
INSULATION RESISTANCE	:	100M OHMS MIN
CONTACT RESISTANCE	:	30m OHMS MAX
WITHSTAND VOLTAGE	:	500V AC

MECHANICAL DATA

INSERTION & EXTRACTION FORCE	:	3-20N
MECHANICAL LIFE	:	5000 cycles

ENVIRONMENTAL DATA




IP RATING	:	IP 65
-----------	---	-------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : $\phi 2.0$ mm DC POWER JACK, WITH 3 TERMINALS S/T
PANEL MOUNT WATER PROOF.

PART NO: PDCJ11-02A

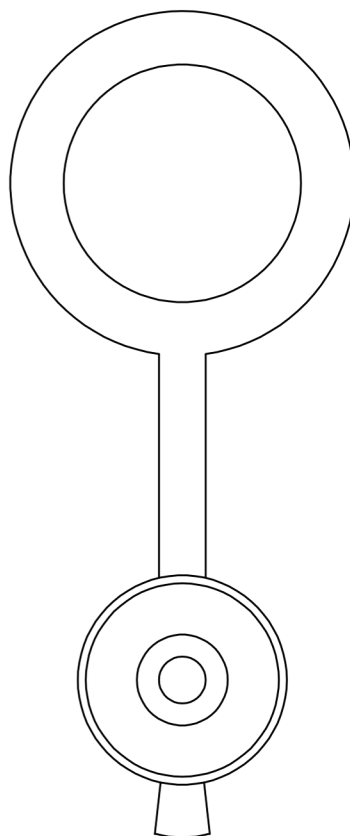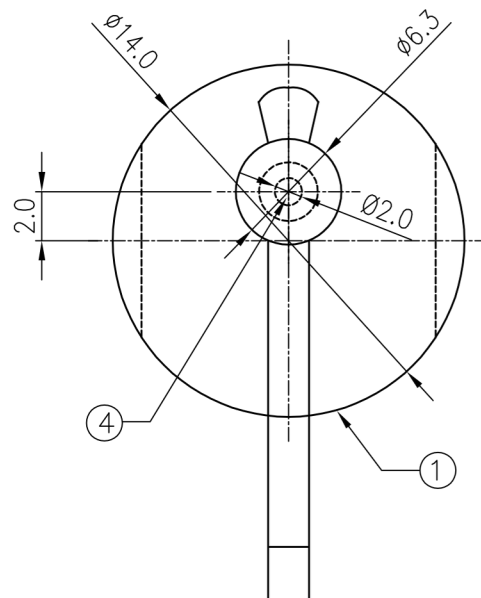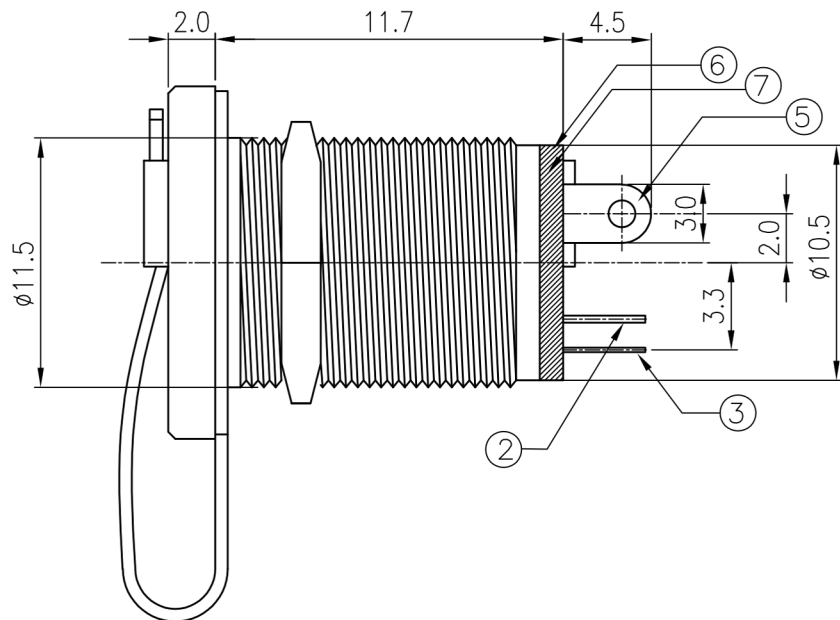

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.5 mm
 ± 0.2




ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.



PROTECTRON[®]
ELECTROMECH (P) LTD



DESCRIPTION : Ø2.0mm DC POWER JACK, WITH 3 TERMINALS S/T
PANEL MOUNT WATER PROOF.

PART NO: PDCJ11-02A

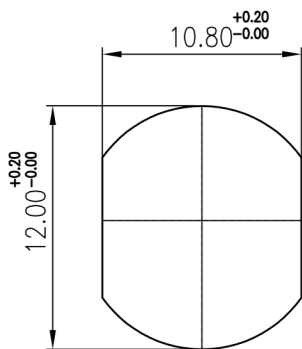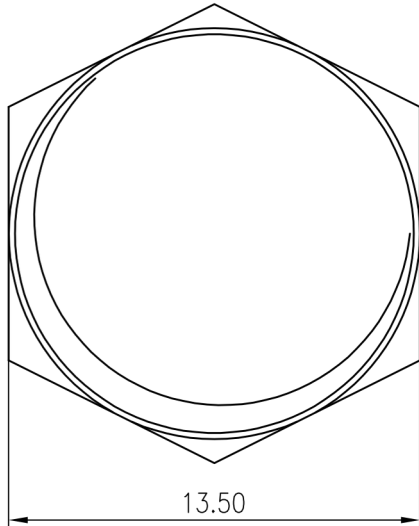


MOUNTING DETAILS

SCHEMATIC

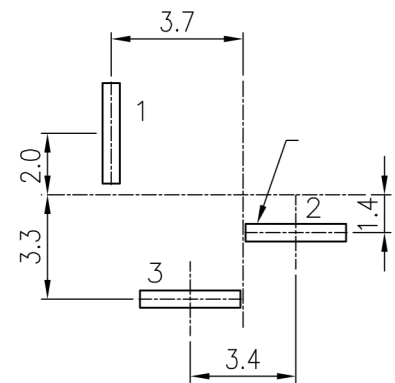

P.C.B LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±0.2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.