



DESCRIPTION : EV CHARGING VEHICLE SIDE

PART NO: PEVCS021-20-11-07

RoHS



ELECTRICAL PARAMETERS:

RATED VOLTAGE : 60V DC, 240V AC

RATED CURRENT : 55A DC, 32A AC

SIGNAL CURRENT : 2A, <30V DC

MATERIAL AND FINISH

BODY : THERMOPLASTIC

TERMINALS : COPPER ALLOY, SILVER PLATING

CHARGING CABLE : 55A, 3P+DC+DC- CAN+CAN- +PP+CP


DEGREE OF PROTECTION : IP44

AMBIENT TEMPERATURE : -25°C TO +40°C



DESCRIPTION : EV CHARGING VEHICLE SIDE

PART NO:PEVCS021-20-11-07

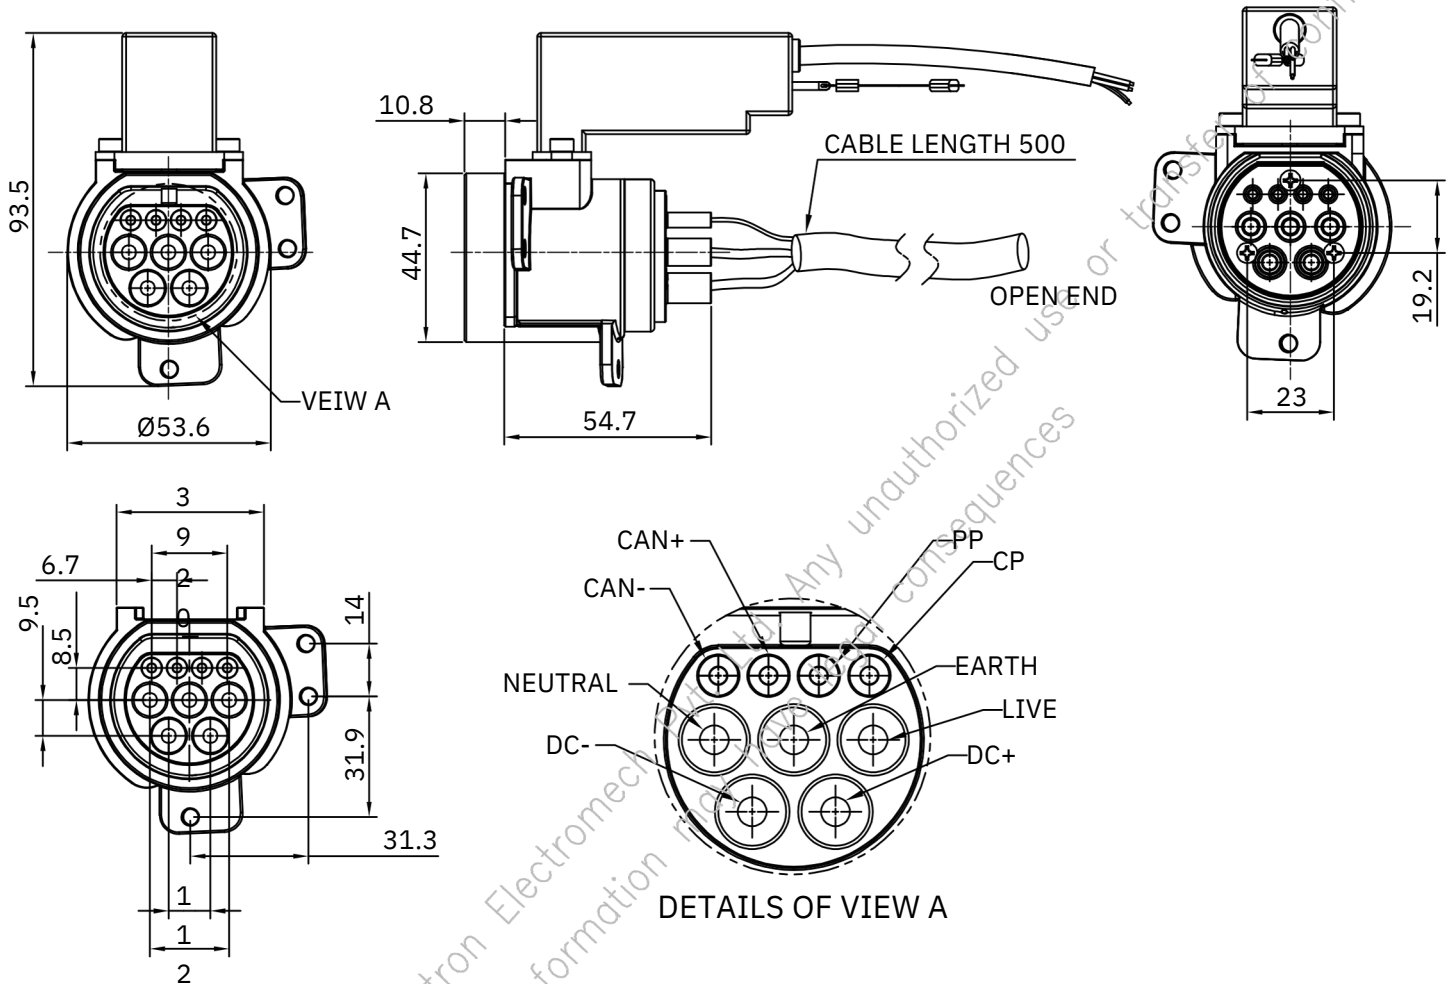

1 RECOMMEND CABLE SPECIFICATION

FUNCTION	TERMINALS	GAUGE
SIGNAL	PP	0.5 Sqmm
	CP	0.5 Sqmm
	CAN-	0.5 Sqmm
	CAN+	0.5 Sqmm
EARTH	EARTH	2.5 Sqmm
	DC-	13 Sqmm
DC	DC+	13 Sqmm
	LIVE	2.5 Sqmm
AC	NEUTRAL	2.5 Sqmm

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.