

**DESCRIPTION** : HIGH VOLTAGE AUTOMOTIVE FUSE WITH BOLT  
DOWN TYPE  $\phi$ 20.0mm MAX

**PART NO:** PEVFC 100 In  
(REFER TABLE)



RoHS



**ELECTRICAL PARAMETERS:**

RATED VOLTAGE : DC 450V  
INTERRUPTING RATING FOR 100A & 125A : 2000A @ 450V DC  
INTERRUPTING RATING FOR 150A TO 250A : 1500A @ 450V DC  
OPERATING TEMPERATURE RANGE : -40°C TO +85°C

**MATERIAL AND FINISH**

BODY : CERAMIC TUBE  
ELEMENT : COPPER,SILVER PLATED  
BOLTING TAB : COPPER,TIN PLATED  
CAP : COPPER,TIN PLATED  
COMPLIES WITH : ISO 8820-8




**PACKING DETAILS:**

STANDARD : 50 OR 100 No's BOX PACKING  
CUSTOMIZED PACKING IS AVAILABLE BASED ON REQUEST



**DESCRIPTION :** HIGH VOLTAGE AUTOMOTIVE FUSE WITH BOLT DOWN TYPE  $\phi 20.0\text{mm}$  MAX

**PART NO:** PEVFC 100 In (REFER TABLE)

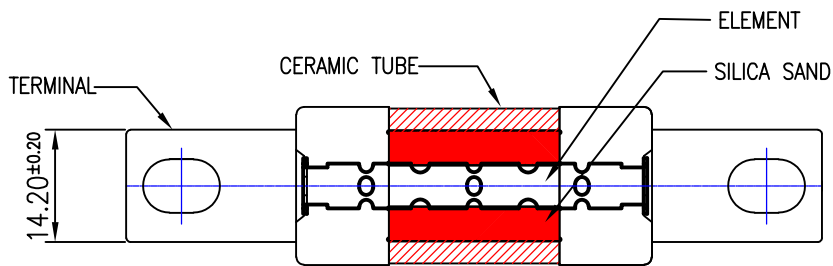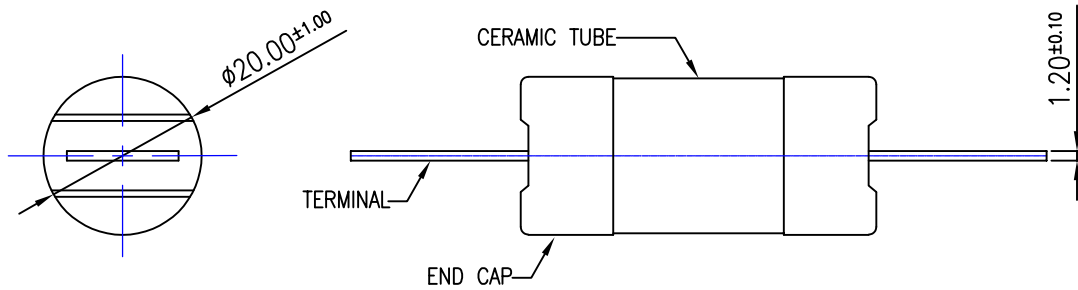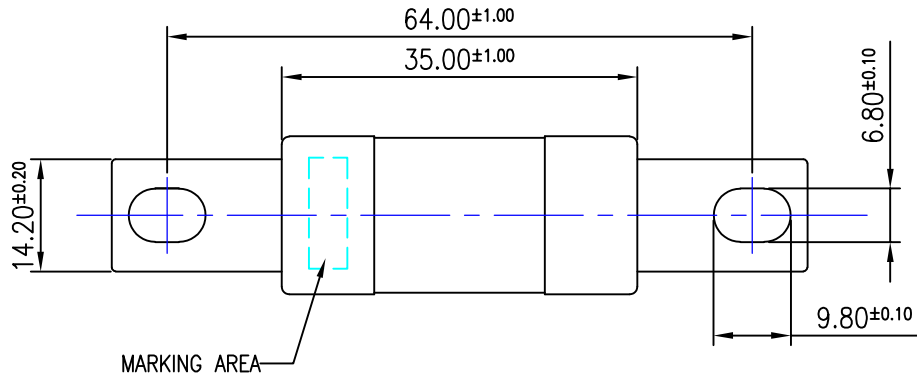

**MARKINGS ON THE INSULATOR SHOULD BE AS FOLLOWS:-**

'AMPERAGE', 'VOLTAGE RATING' 'INTERRUPTING RATING'

AND 'PROTECTRON' (MANUFACTURER)


**In-NOMINAL CURRENT RATING**

PART NUMBERS	CURRENT RATING (A)	BOLT SIZE	DIAMETER	TYPICAL VOLTAGE DROP @ 50% RATED CURRENT (mV)	TYPICAL COLD RESISTANCE (m $\Omega$ )
PEVFC 100 100A	100A	M6	$\phi 20.00$	40.5 mV	0.87
PEVFC 100 125A	125A			41.5 mV	0.68
PEVFC 100 150A	150A			43.5 mV	0.58
PEVFC 100 200A	200A			45.5 mV	0.35
PEVFC 100 250A	250A			59.5 mV	0.31

**DESCRIPTION :** HIGH VOLTAGE AUTOMOTIVE FUSE WITH BOLT DOWN TYPE  $\phi$ 20.0mm MAX

**PART NO:** PEVFC 100 In  
(REFER TABLE)


**TIME-CURRENT CHARACTERISTIC CURVE**

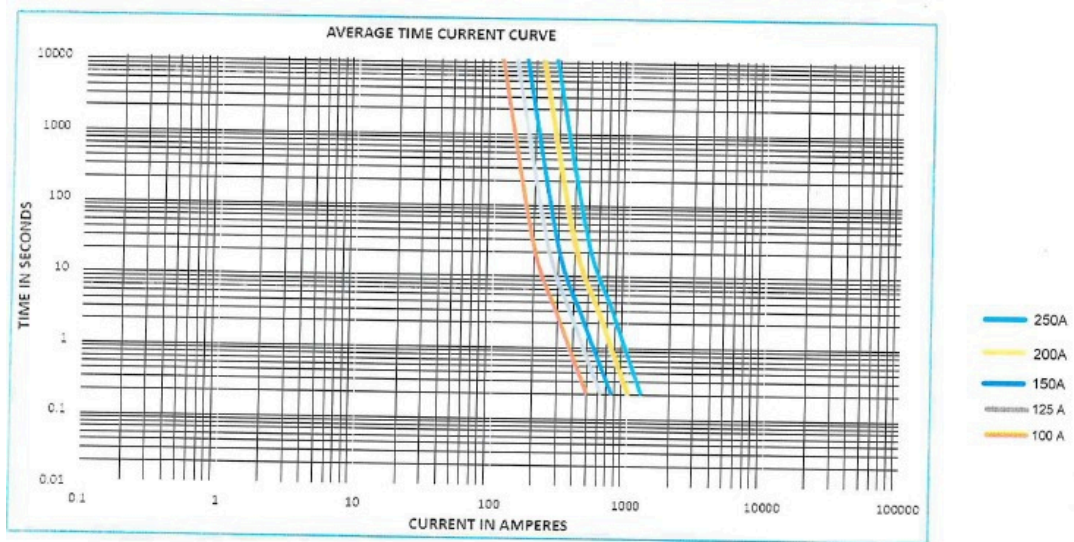

**ELECTRICAL CHARACTERISTICS:-**

% OF AMPERE RATING	AMPERE RATING	OPENING TIME
110%	100-250A	04 Hours Min.
200%		01sec Min 300sec Max.
300%		0.20sec Min 30sec, Max.
500%		0.05sec Min 01sec, Max.

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.:  $\pm 0.25\text{mm}$   
 $\pm 2'$

ALL DIMENSIONS ARE IN MM.  
IF UNLESS OTHERWISE SPECIFIED.