




**DESCRIPTION : MIDI BLADE FUSE HOLDER TO CONNECTOR
TERMINAL**

PART NO: PFT 200 IN



RoHS

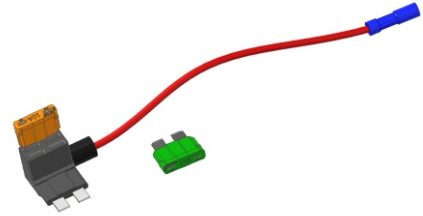

PHYSICAL DATA

INSULATION DATA

MATERIAL	:	PA66
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK COLOUR
TERMINAL	:	COPPER ALLOY, NICKEL PLATED
CONNECTION TERMINAL	:	COPPER ALLOY, NICKEL PLATED + PVC JACKET

ELECTRICAL DATA

INSULATION RESISTANCE	:	500V DC AT 100M OHMS
DIELECTRIC WITHSTANDING	:	2000V AC/1Min.
RATED VOLTAGE	:	32V
RATED CURRENT	:	FOR 16AWG – 15A FOR 14AWG – 25A FOR 12AWG – 40A

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-10°C TO +85°C
-------------------	---	----------------



FEATURES

CABLE	:	16AWG CABLE, RED COLOR
-------	---	------------------------



**DESCRIPTION : MIDI BLADE FUSE HOLDER TO CONNECTOR
TERMINAL**

PART NO: PFT 200 IN

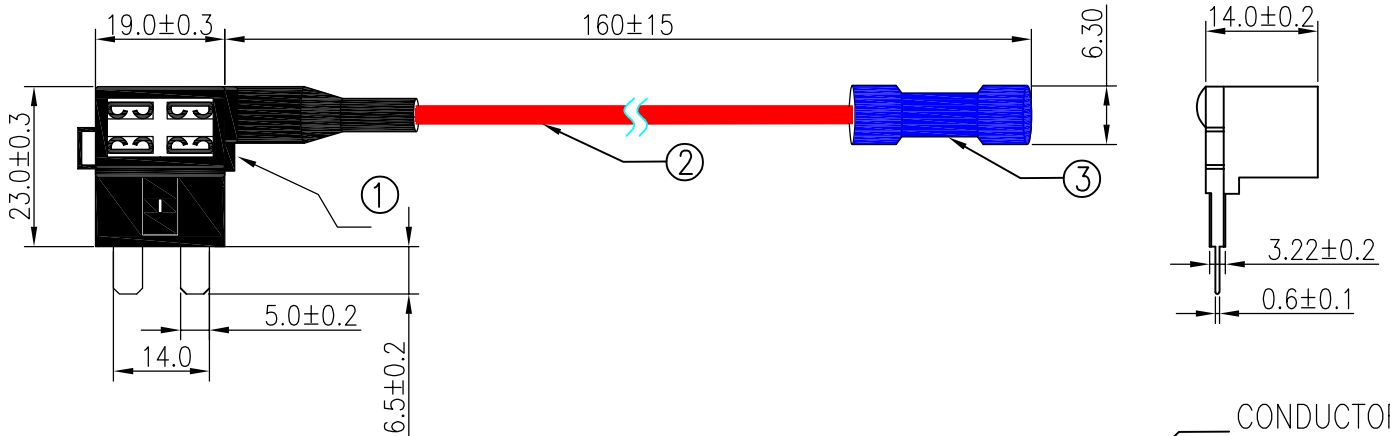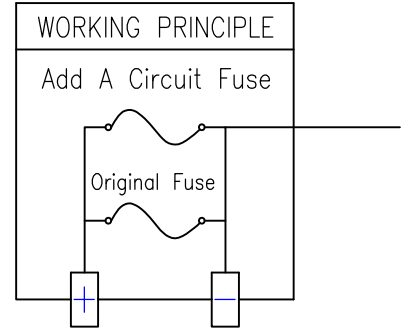


16 AWG CABLE(REF)

CONDUCTOR:
65/0.16 TC

JACKET:
Red 3.1±0.15

3	TERMINAL : Ø3.0x4.00mm O TYPE, NICKEL PLATED COPPER, BLUE INSULATION
2	RED COLOR CABLE (16AWG/14AWG/12AWG)
1	STANDARD BLADE FUSE HOLDER, BLACK
NO.	DESCRIPTION

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.30mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.