




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MINI BLADE FUSE HOLDER TO CONNECTOR
TERMINAL

PART NO: PFT 300 IN

RoHS

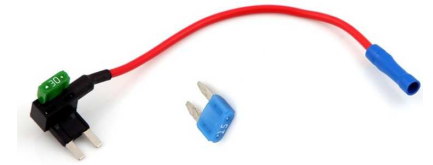

PHYSICAL DATA

INSULATION DATA

MATERIAL	:	PA66
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK COLOUR
TERMINAL	:	COPPER ALLOY, NICKEL PLATED
CONNECTION TERMINAL	:	COPPER ALLOY, NICKEL PLATED + PVC JACKET

ELECTRICAL DATA

INSULATION RESISTANCE	:	500V DC AT 100M OHMS
DIELECTRIC WITHSTANDING	:	2000V AC/1Min.
RATED VOLTAGE	:	32V
RATED CURRENT	:	FOR 16AWG – 15A FOR 14AWG – 25A FOR 12AWG – 40A

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-10°C TO +85°C
-------------------	---	----------------

FEATURES




CABLE	:	16AWG CABLE, RED COLOR
-------	---	------------------------




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MINI BLADE FUSE HOLDER TO CONNECTOR
TERMINAL

PART NO: PFT 300 IN

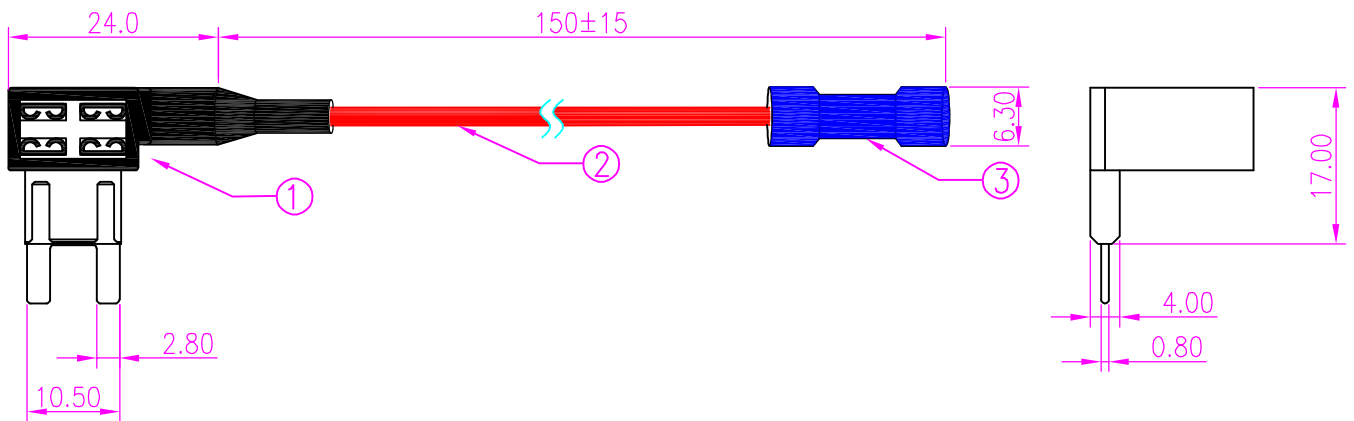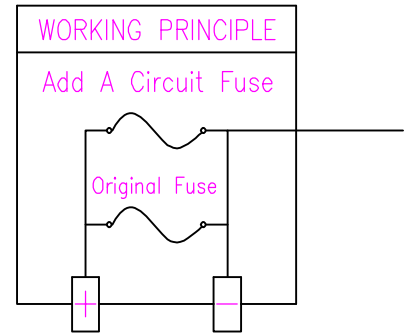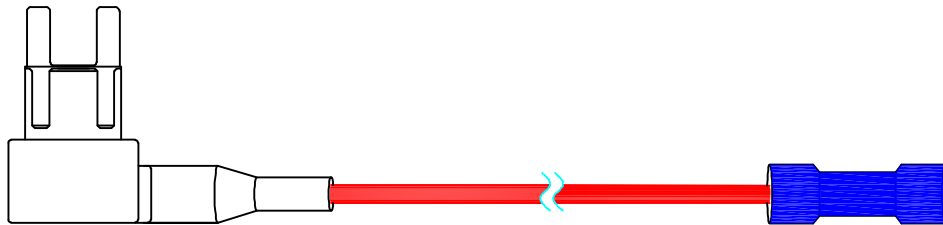

16 AWG CABLE

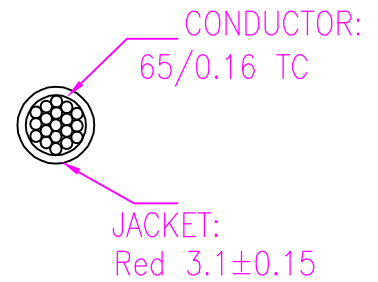

3	TERMINAL : Ø3.0x4.00mm O TYPE, NICKEL PLATED COPPER, BLUE INSULATION
2	16AWG CABLE, COLOR:RED
1	MINI BLADE FUSE HOLDER, BLACK
NO.	DESCRIPTION

A	ORIGINAL	RAMYA	04.04.2019	CHETAN		
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.:±0.30mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	

<http://www.protectron.in>
protectron@protectron.in