




DESCRIPTION : RADIAL LEAD MICRO FUSES TIME LAG, 10A

PART NO: PMT 10A V6

RoHS



PHYSICAL DATA

MATERIAL

BASE AND CAP : PA66, UL 94-V0. BLACK COLOR

ROUND PINS : COPPER, TIN PLATED

PACKAGING TYPE

IN BULK : 1000 pcs per box

ON TAPE : Ammo Pack, 1000pcs box

ELECTRICAL DATA

BREAKING CAPACITY : 100A AT 300V AC

RATED CURRENT : 10A

RATED VOLTAGE : 300V AC

MECHANICAL PROPERTIES

TENSILE TEST : 3Kg

THRUST TEST : 2N

BENDING TEST : NO DAMAGE ARE TO BE VISUALIZED AFTER TWO BENDS
OF OPPOSITE DIRECTIONS OF LEAD

ELECTRICAL CHARACTERISTIC

RATED CURRENT	1.5 In	2.1 In	2.75 In		4 In		10 In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
10A	60 min	2 min	400 ms	10 sec	150 ms	3 sec	15 ms	150 ms





PROTECTRON[®]
ELECTROMECH (P) LTD




DESCRIPTION : RADIAL LEAD MICRO FUSES TIME LAG, 10A

PART NO: PMT 10A V6



SHORT LEADS



LONG LEADS

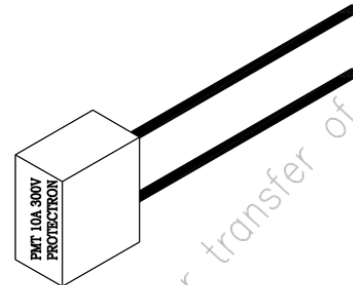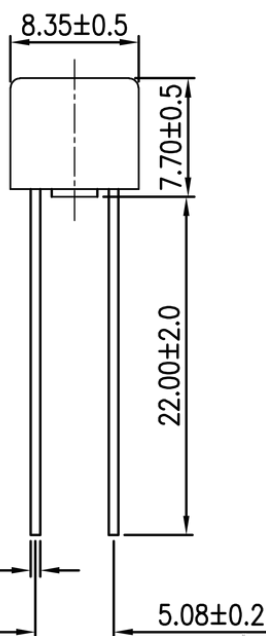

MOUNTING HOLES

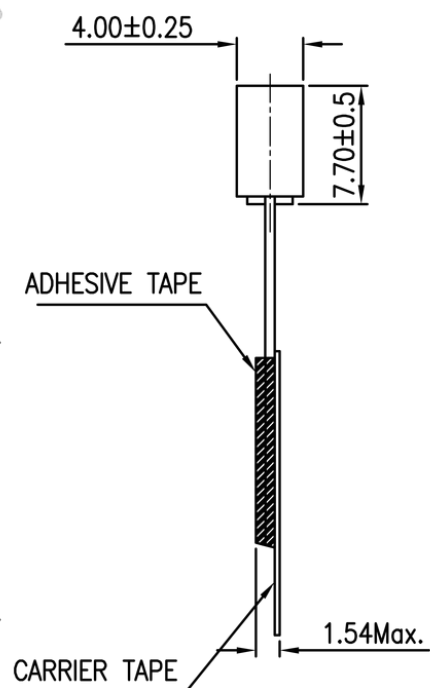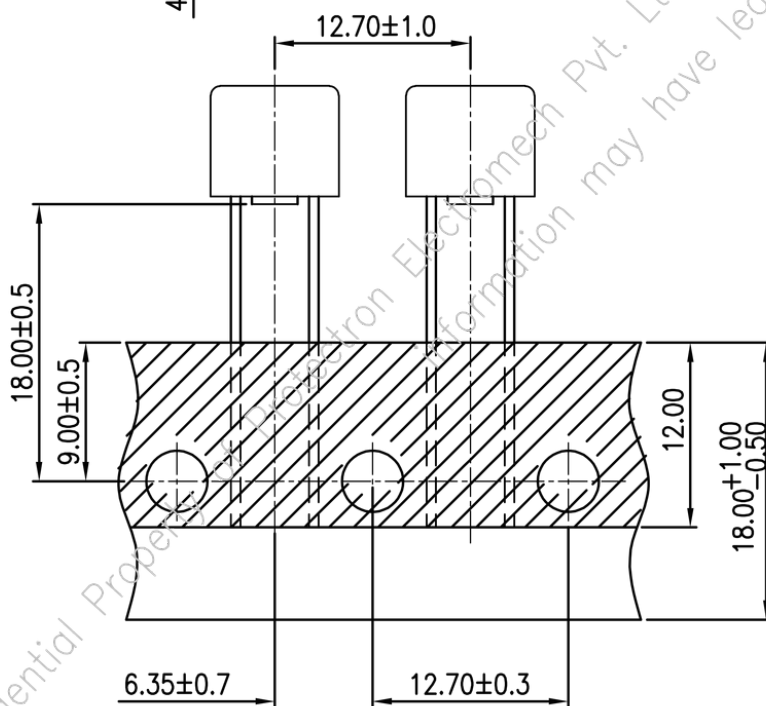

Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.25 mm
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.




DESCRIPTION : RADIAL LEAD MICRO FUSES TIME LAG, 10A

PART NO: PMT 10A V6

TIME LAG FUSES TYPE PMT

PROTECTRON PART NUMBERS	Ampere Rating (In)	Voltage Rating (V)	Nominal Resistance Cold Ohms	Voltage Drop (mv) max	Nominal Melting I^2t A ² Sec
PMT 10A	10A	300V	0.0030	100	310.00

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.25\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.