




DESCRIPTION : RADIAL LEAD MICRO FUSES TIME LAG, 8A

PART NO: PMT 8A

RoHS



PHYSICAL DATA

MATERIAL

BASE AND CAP	:	PA66, UL 94-V0. BLACK COLOR
ROUND PINS	:	COPPER, TIN PLATED
PACKAGING TYPE		
IN BULK	:	1000 pcs per box
ON TAPE	:	Ammo Pack, 1000pcs box

ELECTRICAL DATA

BREAKING CAPACITY	:	100A AT 250V AC
RATED CURRENT	:	8A
RATED VOLTAGE	:	250V AC

MECHANICAL PROPERTIES

TENSILE TEST	:	3Kg
THRUST TEST	:	2N
BENDING TEST	:	NO DAMAGE ARE TO BE VISUALIZED AFTER TWO BENDS OF OPPOSITE DIRECTIONS OF LEAD

ELECTRICAL CHARACTERISTIC

RATED CURRENT	1.5 In	2.1 In	2.75 In		4 In		10 In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
8A	60 min	2 min	400 ms	10 sec	150 ms	3 sec	15 ms	150 ms






PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : RADIAL LEAD MICRO FUSES TIME LAG, 8A


PART NO: PMT 8A

SHORT LEADS


LONG LEADS

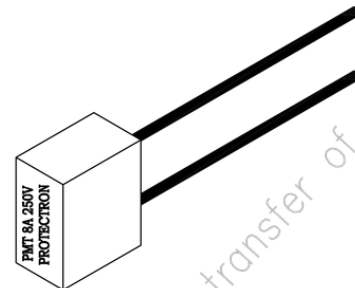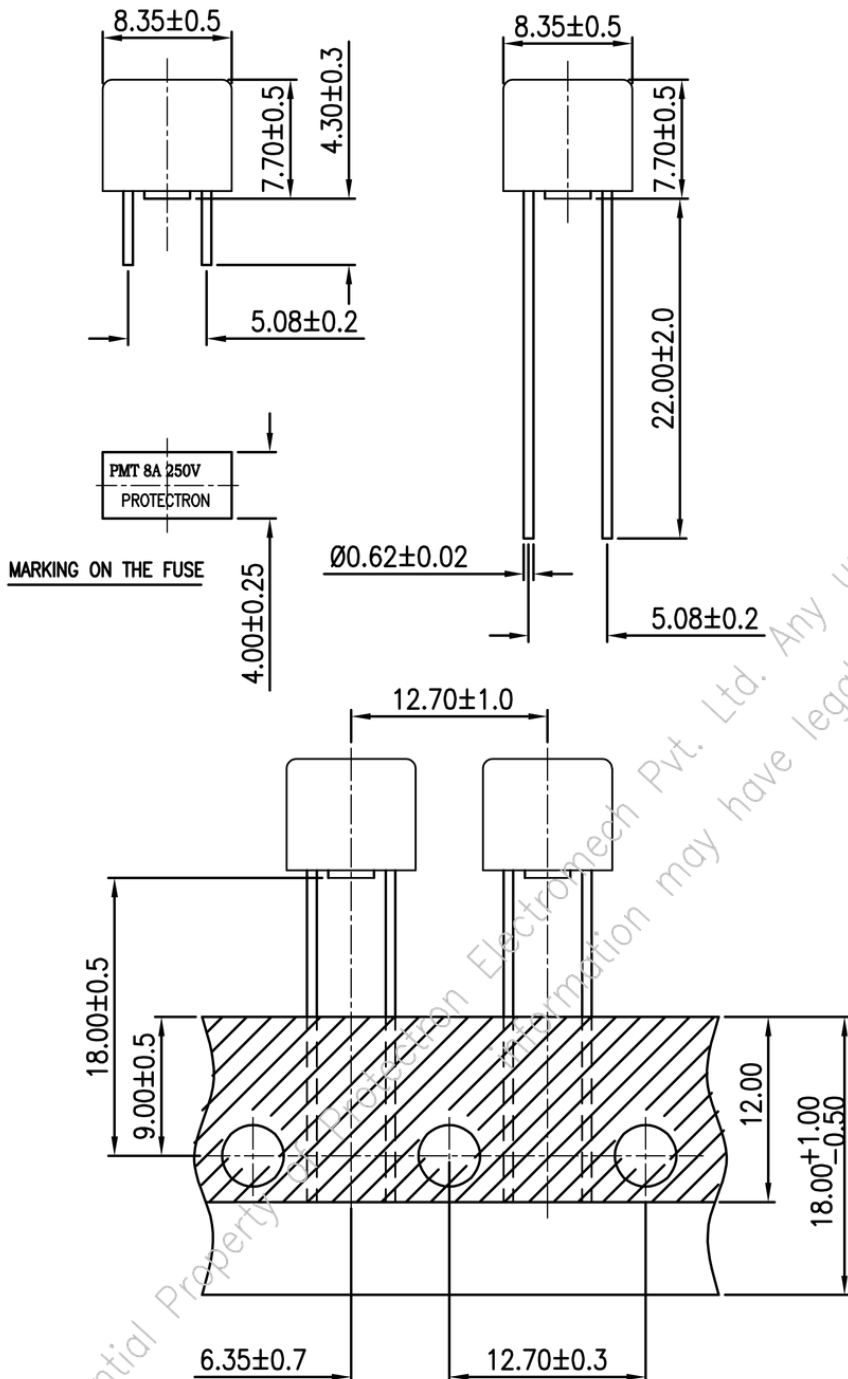

MOUNTING HOLES

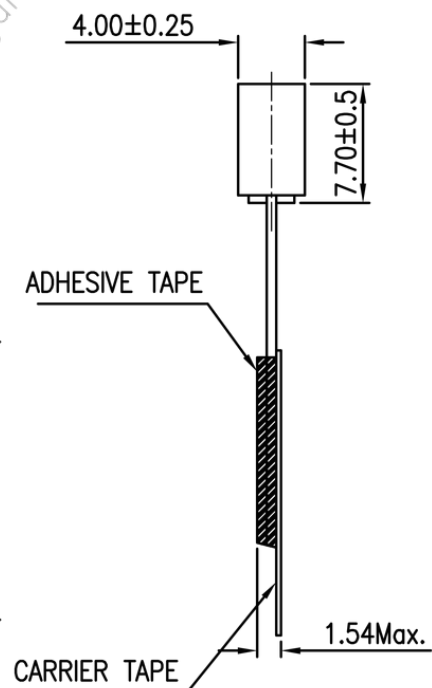

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.25 \text{ mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.



DESCRIPTION : RADIAL LEAD MICRO FUSES TIME LAG, 8A

PART NO: PMT 8A

TIME LAG FUSES TYPE PMT

PROTECTRON PART NUMBERS	Ampere Rating (In)	Voltage Rating (V)	Nominal Resistance Cold Ohms	Voltage Drop (mv) max	Nominal Melting I^2t A ² Sec
PMT 8A	8A	250V	0.0057	100	204.00

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.25\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.