

DESCRIPTION : 5.2x20, GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PSF In

APPROVALS:



SPECIFICATIONS	:	IEC 60127-2, SHEET-II
RATED VOLTAGE	:	250 V
BREAKING CAPACITY	:	35 A OR 10 In WHICHEVER IS GREATER WHEN TESTED WITH AC CURRENT
OPERATING TEMPERATURE	:	-55°C ~ +125°C
CAP	:	BRASS, NICKEL PLATED
BODY	:	GLASS BODY

MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-

TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (250V), RoHS(R), BREAKING CAPACITY (L) & COMPANY'S IDENTIFICATION


NOTE : UL APPROVAL- 100mA TO 6.3A, 8A & 10A

NOMINAL CURRENT (In)	2.1 In MAX.	2.75 In		4 In		10 In MAX.
		MIN.	MAX.	MIN.	MAX.	
100mA	30 MINUTES	10 mSec	500 mSec	3 mSec	100 mSec	20 mSec
>100mA TO 6.3A	30 MINUTES	50 mSec	2 Sec	10 mSec	300 mSec	20 mSec
6.3A TO 8A	30 MINUTES	50 mSec	2 Sec	10 mSec	300 mSec	20 mSec
8 & 10A	30 MINUTES	50 mSec	2 Sec	10 mSec	400 mSec	60 mSec
10A TO 30A	30 MINUTES	50 mSec	2 Sec	10 mSec	400 mSec	40 mSec


DESCRIPTION : 5.2x20, GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PSF In

TIME-CURRENT CHARACTERISTIC CURVES

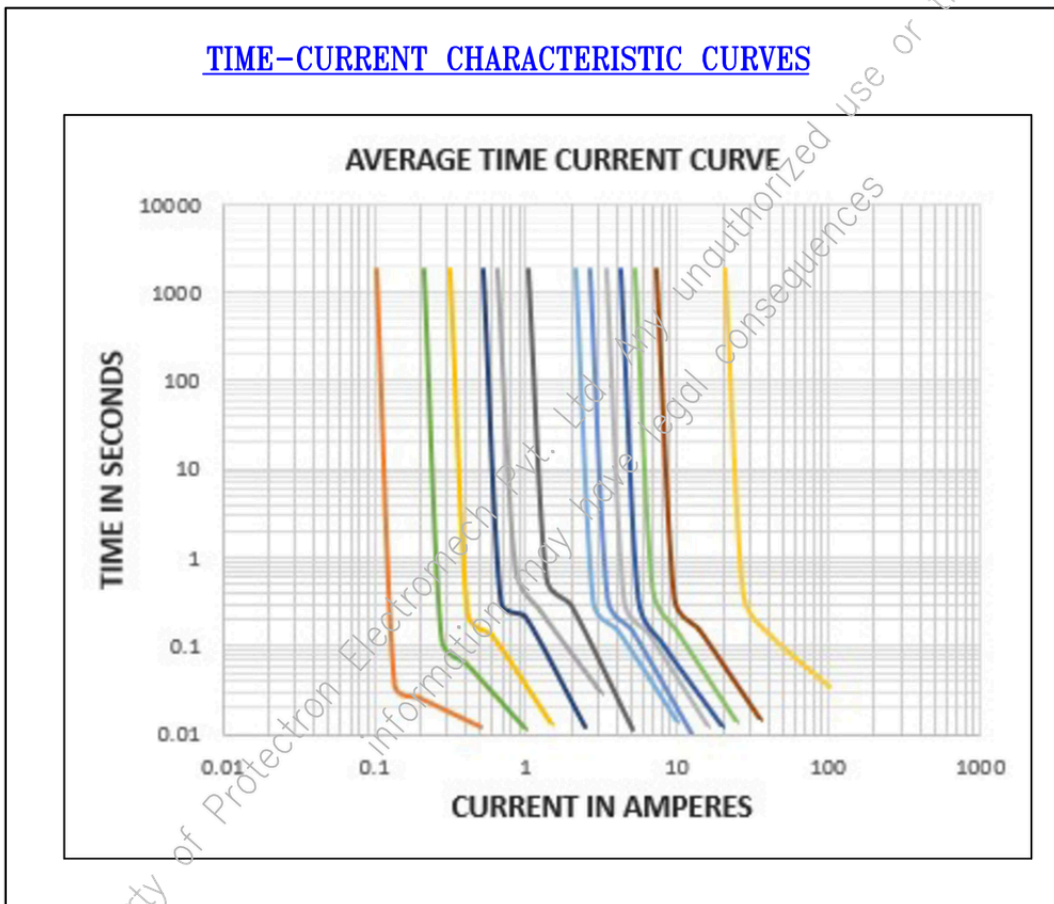

Projection:




Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

DESCRIPTION : 5.2x20, GLASS CARTRIDGE FAST ACTING FUSE

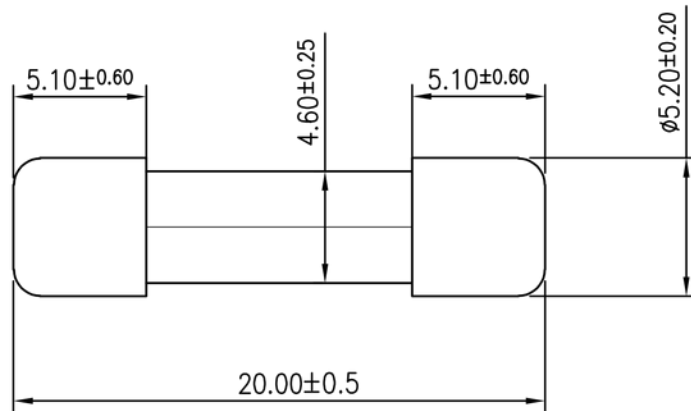PART NO: PSF In


SL.NO	PEPL PART NUMBER	NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)	COLD RESISTANCE (mΩ)	OPERATING I ² t A ² Sec
1	PSF 0.1A	100 mA	4000	6.0	0.0023
2	PSF 0.125A	125 mA	3500	-	0.0067
3	PSF 0.15A	150 mA	2000	-	0.018
4	PSF 0.16A	160 mA	2000	-	0.018
5	PSF 0.2A	200 mA	1700	-	0.030
6	PSF 0.25A	250 mA	1400	-	0.021
7	PSF 0.3A	300 mA	1300	-	0.044
8	PSF 0.315A	315 mA	1300	-	0.044
9	PSF 0.4A	400 mA	1200	-	0.088
10	PSF 0.5A	500 mA	1000	274.26	0.15
11	PSF 0.6A	600 mA	650	-	-
12	PSF 0.63A	630 mA	650	-	0.37
13	PSF 0.7A	700 mA	650	-	-
14	PSF 0.75A	750 mA	240	-	-
15	PSF 0.8A	800 mA	240	-	5.3
16	PSF 1A	1 A	200	81.26	5.1
17	PSF 1.25A	1.25 A	200	-	5.6
18	PSF 1.5A	1.5 A	190	-	6.5
19	PSF 1.6A	1.6 A	190	-	6.5
20	PSF 2A	2 A	170	39.35	7.6
21	PSF 2.5A	2.5 A	170	-	9.8

SL.NO	PEPL PART NUMBER	NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)	COLD RESISTANCE (mΩ)	OPERATING I ² t A ² Sec
22	PSF 3A	3 A	150	264.30	20
23	PSF 3.15A	3.15 A	150	-	20
24	PSF 3.5A	3.5 A	150	-	-
25	PSF 4A	4 A	130	-	29
26	PSF 4.5A	4.5 A	130	-	-
27	PSF 5A	5 A	130	15.32	38
28	PSF 6A	6 A	130	-	62
29	PSF 6.3A	6.3 A	130	-	62
30	PSF 7A	7 A	130	-	-
31	PSF 7.5A	7.5 A	130	-	-
32	PSF 8A	8 A	130	-	103
33	PSF 9A	9 A	130	-	-
34	PSF 10A	10 A	130	-	184
35	PSF 12A	12 A	130	-	-
36	PSF 15A	15 A	130	-	-
37	PSF 16A	16 A	130	-	-
38	PSF 18A	18 A	130	-	-
39	PSF 20A	20 A	130	-	-
40	PSF 25A	25 A	130	-	-
41	PSF 30A	30 A	130	-	-

ORDERING INFORMATION

 PSF... mA(In ≤ 800mA)-R OR
 PSF... A(In ≥ 1A)-R