



DESCRIPTION : MODULAR JACK, SHIELDED, SIDE ENTRY,
LONG BODY

PART NO: PSY001SL-10P8CX

RoHS



PHYSICAL

MATERIAL

INSULATOR	:	PBT
FLAMABILITY	:	UL 94V-0
COLOR	:	BLACK COLOR
CONTACT	:	PHOSPHOR BRONZE
PLATING	:	SEE TABLE
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL

CONTACT RESISTANCE	:	30m OHMS MAX
INSULATION RESISTANCE	:	500M OHMS MIN
VOLTAGE RATING	:	150V AC MAX
CURRENT RATING	:	1.5A
DIELECTRIC WITHSATNDING	:	500V AC/MIN

MECHANICAL DATA




MECHANICAL LIFE	:	50 CYCLES MIN
-----------------	---	---------------

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-40° TO +70° C
-------------------	---	----------------


DESCRIPTION : MODULAR JACK, SHIELDED, SIDE ENTRY,
LONG BODY

PART NO: PSY001SL-10P8CX

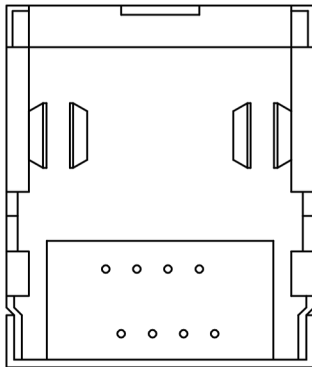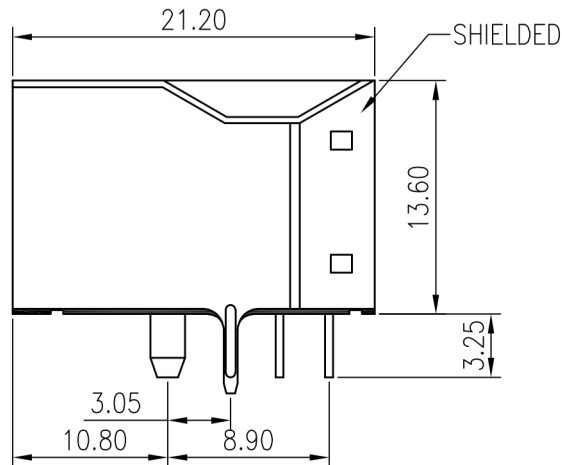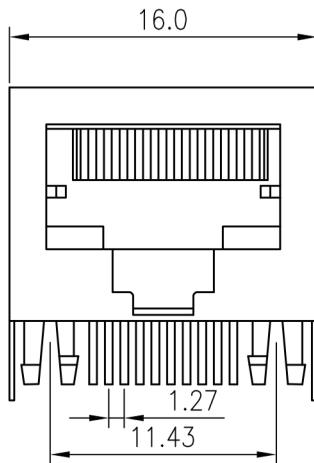


PSY001SL-10P8CX

X	PLATING
1	6μ" GOLD PLATED
2	0.75μ GOLD PLATED
4	TIN PLATED
6	GOLD ON CONTACT AREA TIN ON TAIL

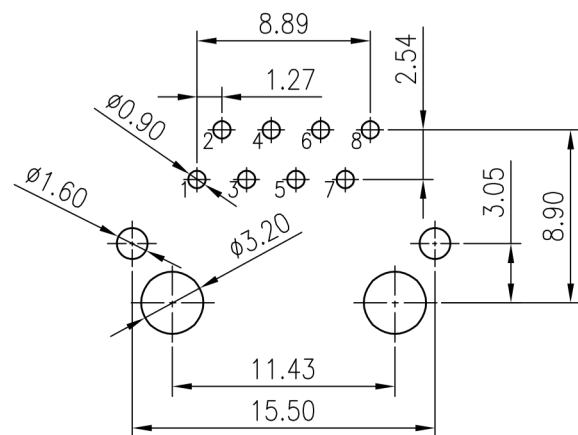

P.C.B LAYOUT

Projection:



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.