



DESCRIPTION: MODULAR JACK, SHIELDED, SIDE ENTRY, LONG BODY **PART NO:** PSY001SLX-XPXCX

RoHS



PHYSICAL DATA


INSULATION BODY : PBT UL94V-0, BLACK COLOUR
 CONTACT : COPPER ALLOY
 SHIELDING : COPPER ALLOY, TIN PLATED

ELECTRICAL DATA

VOLTAGE RATING : 150V AC MAX
 CURRENT RATING : 1.5A
 CONTACT RESISTANCE : 30m OHMS MAX
 INSULATION RESISTANCE : 500M OHMS MIN
 DIELECTRIC WITHSTANDING : 500V AC FOR ONE MINUTE

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C

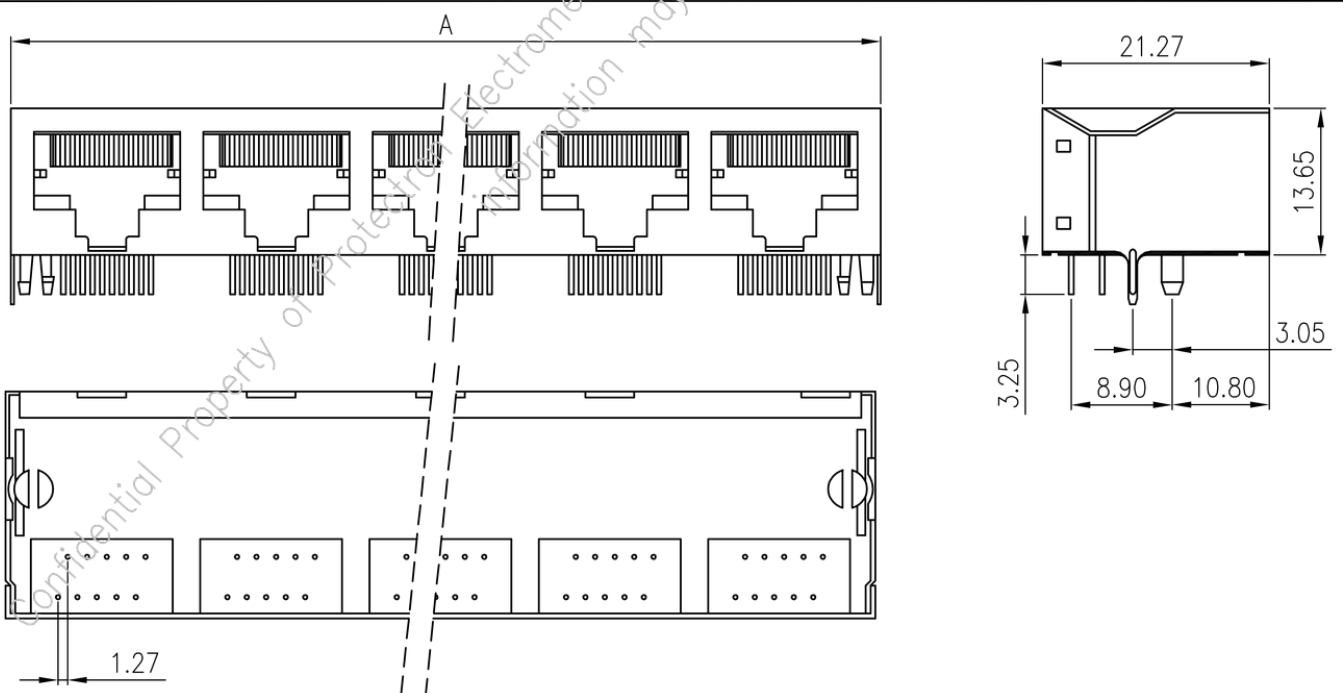



DESCRIPTION: MODULAR JACK, SHIELDED, SIDE ENTRY, LONG BODY PART NO:PSY001SLX-XPXCX


DIMENSIONS	NO. OF PORTS				
	2	4	5	6	8
A	31.20	59.10	73.0	87.30	114.80
B	25.40	53.34	67.30	81.30	109.20
C	13.98	41.94	55.92	69.90	97.86
D	30.80	58.90	72.80	86.80	114.60

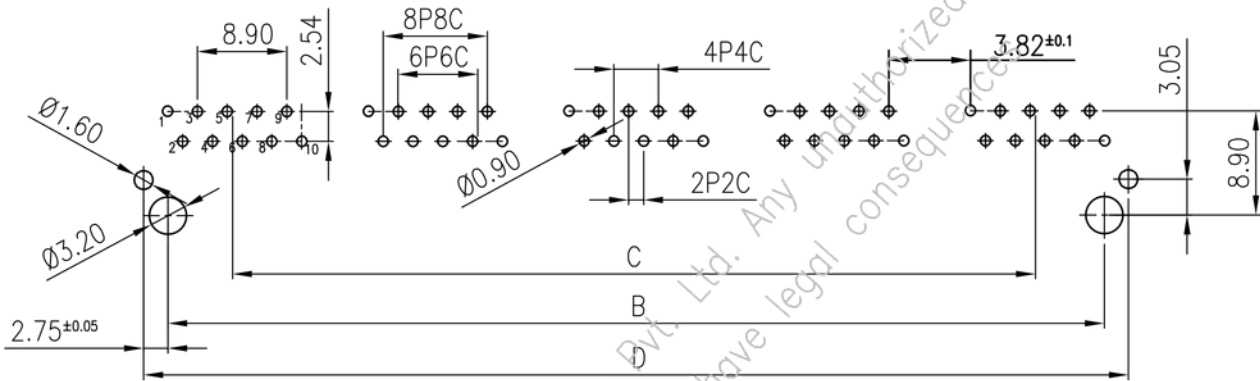

RECOMMENDED PCB LAYOUT

ORDERING INFORMATION

PSY001SLX-XPXCX

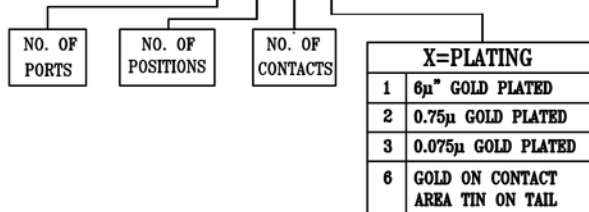

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.50mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.