

DESCRIPTION: MODULAR JACK, SHIELDED, SIDE ENTRY, LONG BODY

PART NO: PSY001SLX-XPXCX

RoHS



PHYSICAL DATA


INSULATION BODY	:	PBT UL94V-0, BLACK COLOUR
CONTACT	:	COPPER ALLOY, GOLD FLASH
SHIELDING	:	COPPER ALLOY, TIN PLATED

ELECTRICAL DATA

VOLTAGE RATING	:	125V AC MAX
CURRENT RATING	:	1.5A
CONTACT RESISTANCE	:	30m OHMS MAX
INSULATION RESISTANCE	:	500M OHMS MIN
DIELECTRIC WITHSTANDING	:	1000V AC FOR ONE MINUTE

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40°C TO +85°C
-------------------	---	----------------

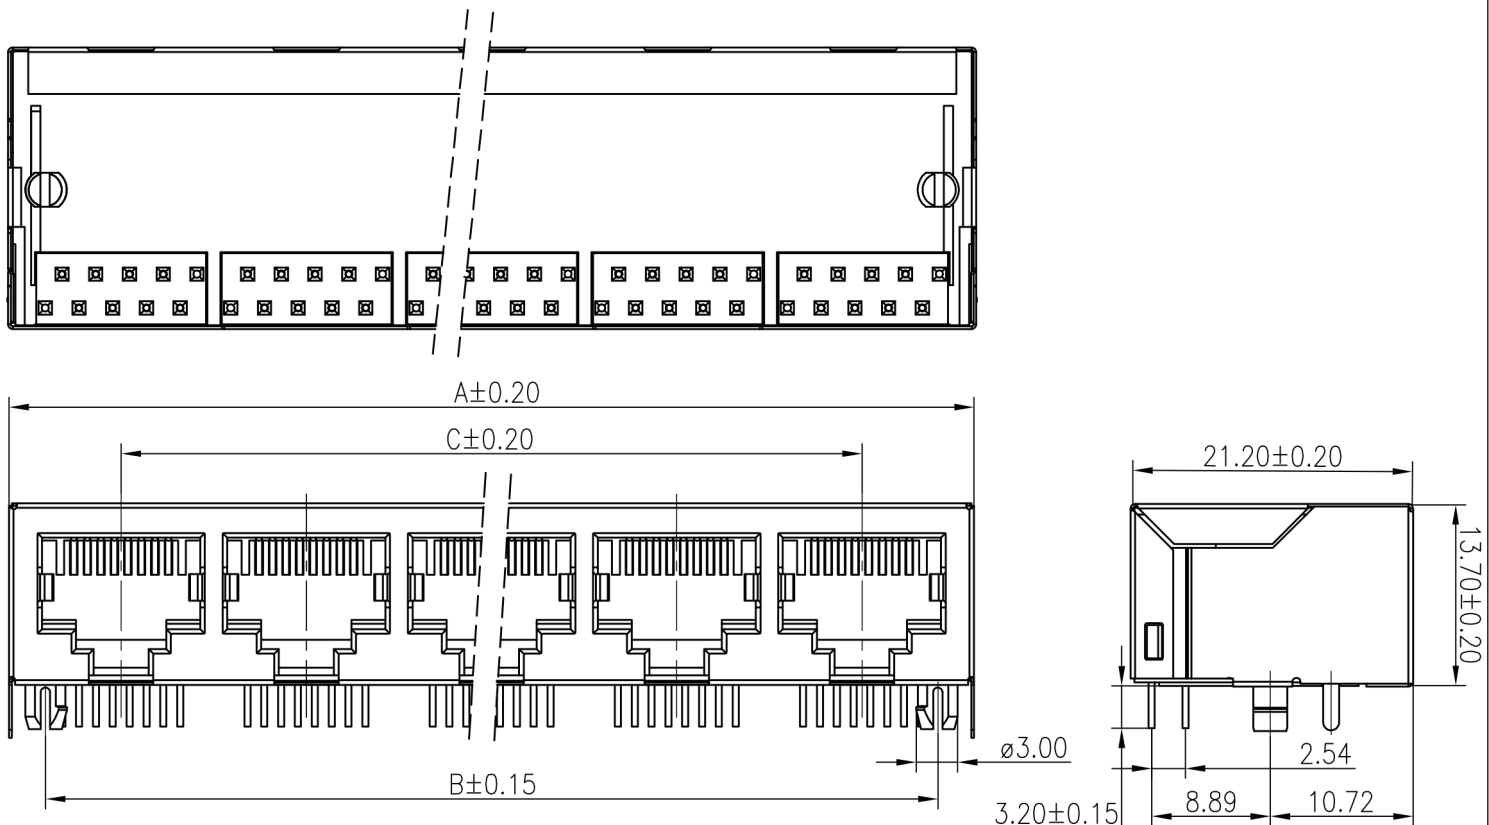

DESCRIPTION: MODULAR JACK, SHIELDED, SIDE ENTRY, LONG BODY

PART NO: PSY001SLX-XPXCX

DIMENSIONS	NO. OF PORTS				
	2	4	5	6	8
A	31.20	59.10	72.79	87.30	114.80
B	25.40	53.34	67.31	81.30	109.20
C	13.98	41.94	55.88	69.90	97.86
D	30.80	58.90	72.67	86.80	114.60

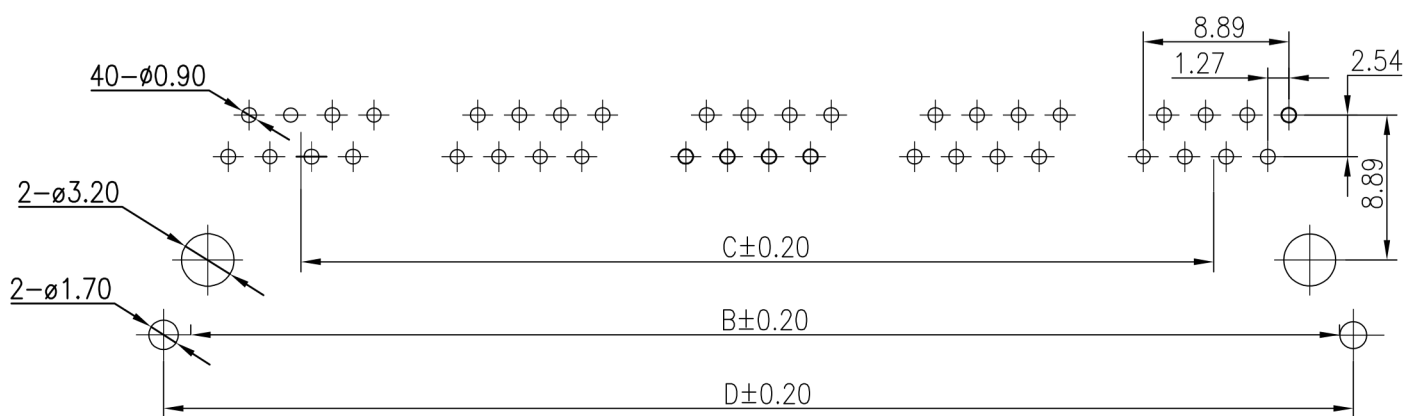

RECOMMENDED PCB LAYOUT

ORDERING INFORMATION

PSY001SLX-XPXCX

NO. OF PORTS	NO. OF POSITIONS	NO. OF CONTACTS	X=PLATING	
			1	6 μ " GOLD PLATED
			2	0.75 μ GOLD PLATED
			3	0.075 μ GOLD PLATED
			6	GOLD ON CONTACT AREA TIN ON TAIL

Projection:



Scale: NTS

Sht. Size: A4

 Gen. Tol.: $\pm$ 0.50mm
 $\pm$ 2°

 ALL DIMENSIONS ARE IN MM.
 IF UNLESS OTHERWISE SPECIFIED.