


DESCRIPTION : RJ45 MODULAR JACK, TOP ENTRY WITH FLANGE
8P8C,GOLD PLATED,RoHS

PART NO: PSY009-8P8C-1

RoHS



PHYSICAL DATA

INSULATION

MATERIAL	:	PBT
FLAMMABILITY	:	UL94V-0
CONTACT	:	COOPER ALLOY,GOLD PLATING
PACKAGING TYPE	:	TRAY PACKING

ELECTRICAL DATA

CURRENT RATING	:	1.50A
INSULATION RESISTANCE	:	500MΩ Max.
DIELECTRIC WITHSTANDING	:	1500V AC/MIN
CONTACT RESISTANCE	:	50mΩ Max.
VOLTAGE RATING	:	125V RMS

MECHANICAL DATA

MATING CYCLE	:	500 CYCLES/MINUTE
--------------	---	-------------------

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-40° TO +85° C
WAVE SOLDER TEMPERATURE	:	265°C Max. FOR 5Sec.

MATING DETAILS


RJ 45 PLUG




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : RJ45 MODULAR JACK, TOP ENTRY WITH FLANGE
8P8C,GOLD PLATED,RoHS

PART NO: PSY009-8P8C-1

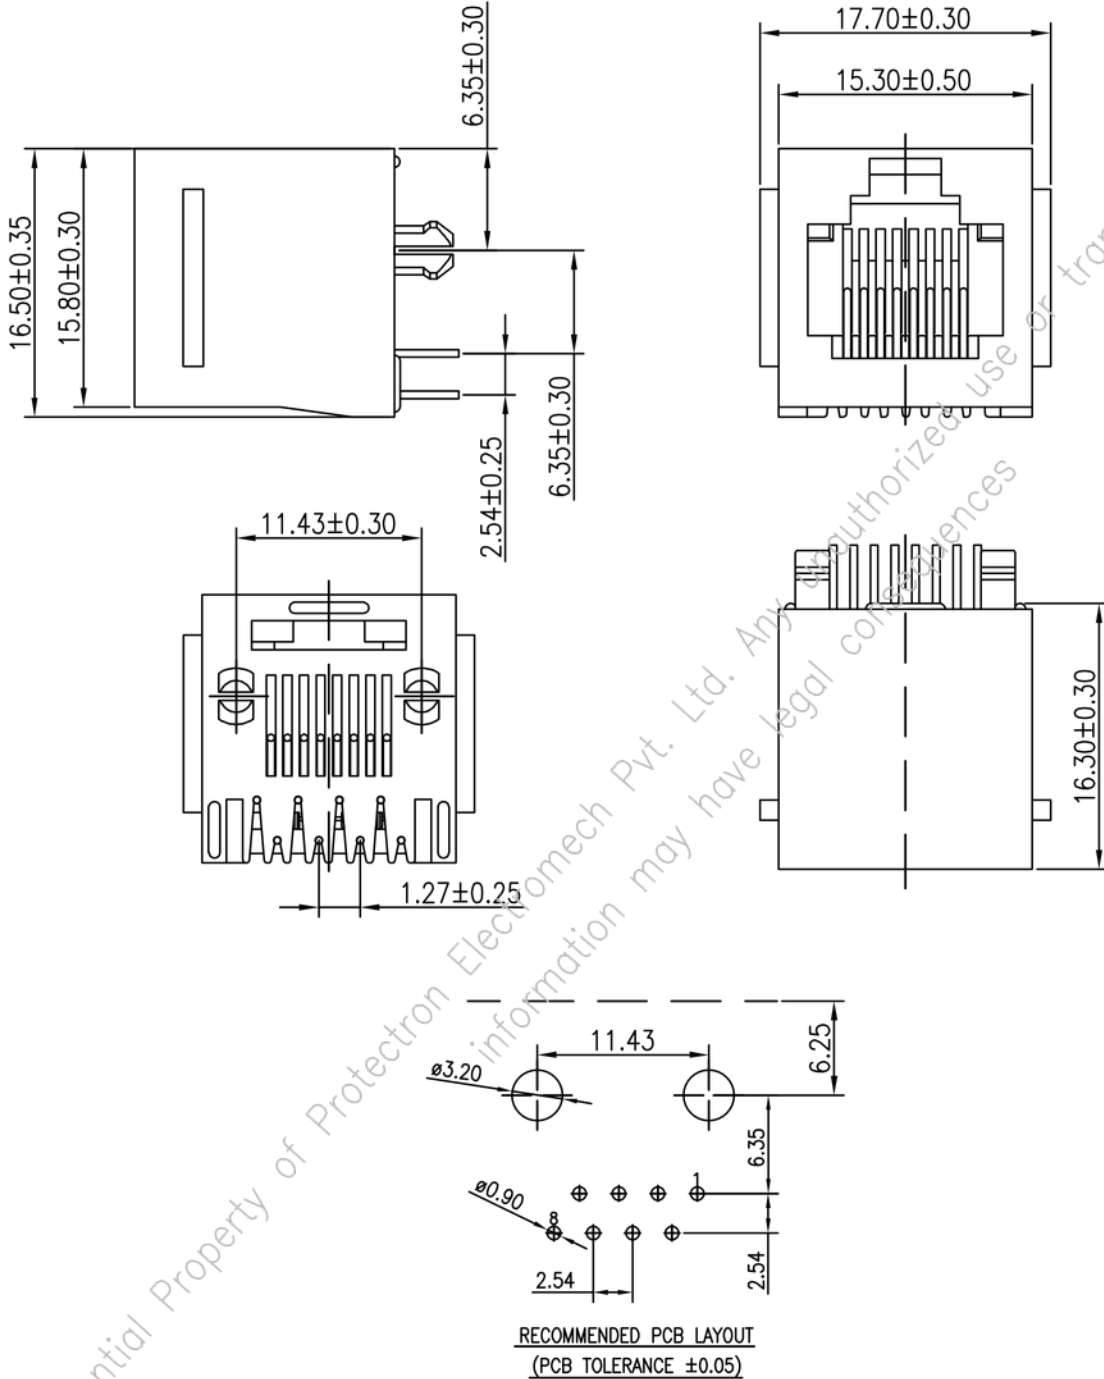

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in