



DESCRIPTION : 6.3x25mm GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF In VK



RATED VOLTAGE : 32 V
CAP : BRASS, NICKEL PLATED
BODY : GLASS

MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-


TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (32V), BREAKING CAPACITY (L) & COMPANY'S IDENTIFICATION

TIME CURRENT CHARACTERISTICS			
NOMINAL CURRENT	1.5 In	1.35 In	1.1 In
	MAX.	MAX.	MIN.
In	15 Sec.	180 Sec.	2 Hour



DESCRIPTION : 6.3x25mm GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF In VK

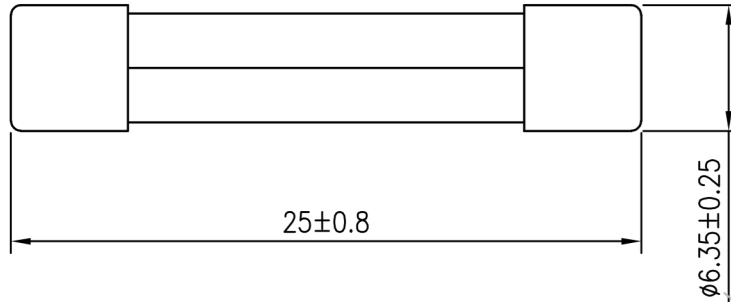

SL.NO	NOMINAL CURRENT RANGE(In)	VOLTAGE DROP DC (mV Max.)
1	0.5A VK	200
2	1A VK	200
3	2A VK	200
4	4A VK	200
5	5A VK	200
6	6A VK	200
7	7A VK	200
8	10A VK	200
9	15A VK	200
10	20A VK	200

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.1mm
±0.2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.