




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 6.3x30mm GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF In VU

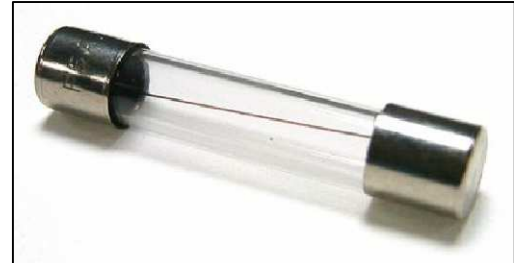

RATED VOLTAGE : 32 V
CAP : BRASS, NICKEL PLATED
BODY : GLASS

MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-

TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (32V), BREAKING CAPACITY (L) & COMPANY'S IDENTIFICATION


TIME CURRENT CHARACTERISTICS			
NOMINAL CURRENT	1.5 In	1.35 In	1.1 In
	MAX.	MAX.	MIN.
In	15 Sec.	180 Sec.	2 Hour



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 6.3x30mm GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF In VU

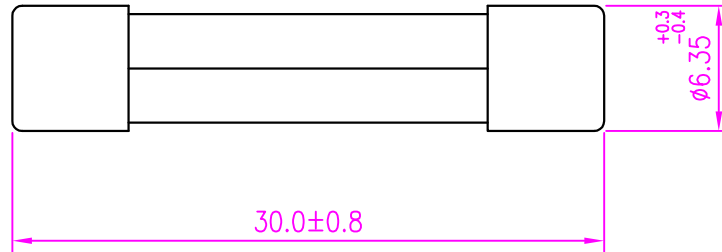


SL.NO	PEPL PART NUMBER	NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)
1	PXF 1A VU	1 A	200
2	PXF 5A VU	5 A	200
3	PXF 7A VU	7 A	200
4	PXF 7.5A VU	7.5 A	200
5	PXF 8A VU	8 A	200
6	PXF 10A VU	10 A	200
7	PXF 15A VU	15 A	200
8	PXF 20A VU	20 A	200

A6	DATASHEET UPDATED	RAMYA	10.08.2018	SUJATHA	
A5	1A RATING REMOVED	MADHU	03.05.2018	SUJATHA	SACHIN
A4	1A RATING INCLUDED	JEEVAN	12.02.2011		
A3	7A RATING INCLUDED, TOLERANCE ON ø6.35mm CORRECTED		17.08.2006		
A2	7.5A RATING INCLUDED		25.05.2003		
A1	RATED VOLTAGE AND 1.1In TIME CHANGED		16.04.2002		
A	ORIGINAL		08.10.2001		

REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY
------	-------------	---------	------	----------	----------

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.1mm
±0.2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>

protectron@protectron.in