




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 6.3x25mm GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF In VK

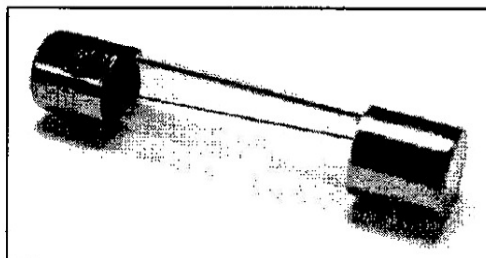

RATED VOLTAGE : 32 V
CAP : BRASS, NICKEL PLATED
BODY : GLASS

MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-

TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (32V), BREAKING CAPACITY (L) & COMPANY'S IDENTIFICATION


TIME CURRENT CHARACTERISTICS			
NOMINAL CURRENT	1.5 In	1.35 In	1.1 In
	MAX.	MAX.	MIN.
In	15 Sec.	180 Sec.	2 Hour



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 6.3x25mm GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF In VK

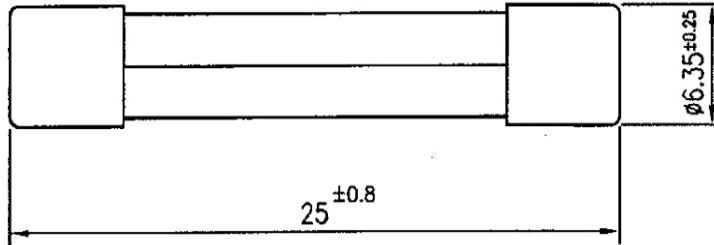

NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)
0.5 A	200
1 A	200
2 A	200
4 A	200
5 A	200
6 A	200
7 A	200
10 A	200
15 A	200
20 A	200

REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY
A4	TOLERANCE UPDATED	VENILA	27.04.2015	<i>[Signature]</i>	<i>[Signature]</i>
A3	INCLUDED CURRENT RATING 0.5A,1A & 2A	SUJATHA	29.10.2011		
A2	20A INCLUDED	SACHIN	06.10.2006		
A1	4A,6A INCLUDED	SACHIN	24.03.2004		
A	ORIGINAL	SACHIN	03.08.2002		

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.1mm ±0.2'	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
-----------------	------------	---------------	----------------------------	---