



DESCRIPTION : 6.3x30mm GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF IN VU

RoHS



RATED VOLTAGE : 32 V
CAP : BRASS, NICKEL PLATED
BODY : GLASS

MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-


TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (32V), BREAKING CAPACITY (L) & COMPANY'S IDENTIFICATION

TIME CURRENT CHARACTERISTICS			
NOMINAL CURRENT	1.5 In	1.35 In	1.1 In
	MAX.	MAX.	MIN.
In	15 Sec.	180 Sec.	2 Hour




DESCRIPTION : 6.3x30mm GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF In VU

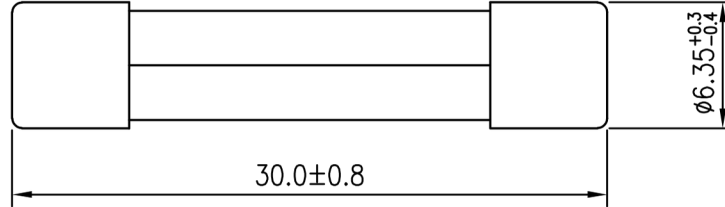

SL.NO	PEPL PART NUMBER	NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)
1	PXF 1A VU	1A	200
2	PXF 5A VU	5A	200
3	PXF 7A VU	7A	200
4	PXF 7.5A VU	7.5A	200
5	PXF 8A VU	8A	200
6	PXF 10A VU	10A	200
7	PXF 15A VU	15A	200
8	PXF 20A VU	20A	200

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.1 mm
 $\pm 0.2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.