

DESCRIPTION : PIN HEADER 2.00mm PITCH DUAL ROW, STRAIGHT
DOUBLE DECKER, RoHS

PART NO: P9118-XXG12-1
XX= NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATION

MATERIAL	:	PA9T
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK COLOR
CONTACT	:	COPPER ALLOY, GOLD PLATED
PACKAGING TYPE	:	STANDARD PACKING

ELECTRICAL DATA

CURRENT RATING	:	2A
INSULATION RESISTANCE	:	5000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC/MIN

MECHANICAL DATA

PIN RETENSION FORCE	:	0.5- KG. MIN
---------------------	---	--------------

ENVIRONMENTAL DATA





TEMPERATURE RANGE	:	-40° TO +105° C
SOLDERING TEMPERATURE	:	260°C FOR 5Sec.



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER 2.00mm PITCH DUAL ROW, STRAIGHT
DOUBLE DECKER, RoHS

PART NO: P9118-XXG12-1
XX= NO. OF CONTACTS

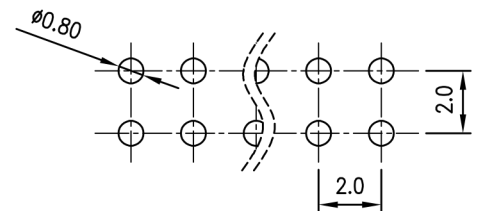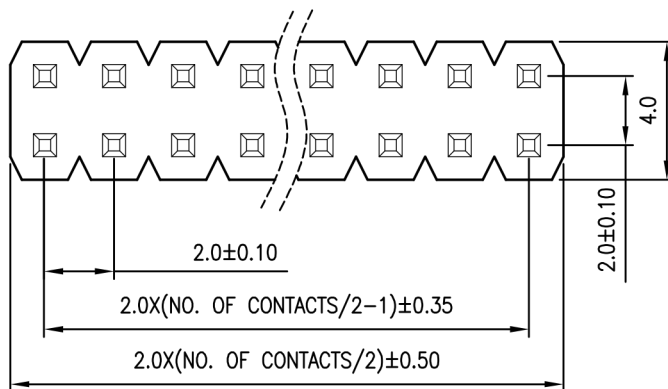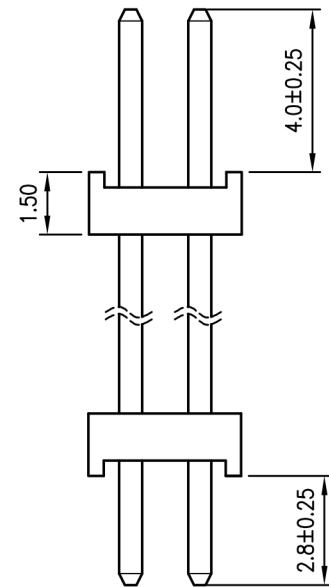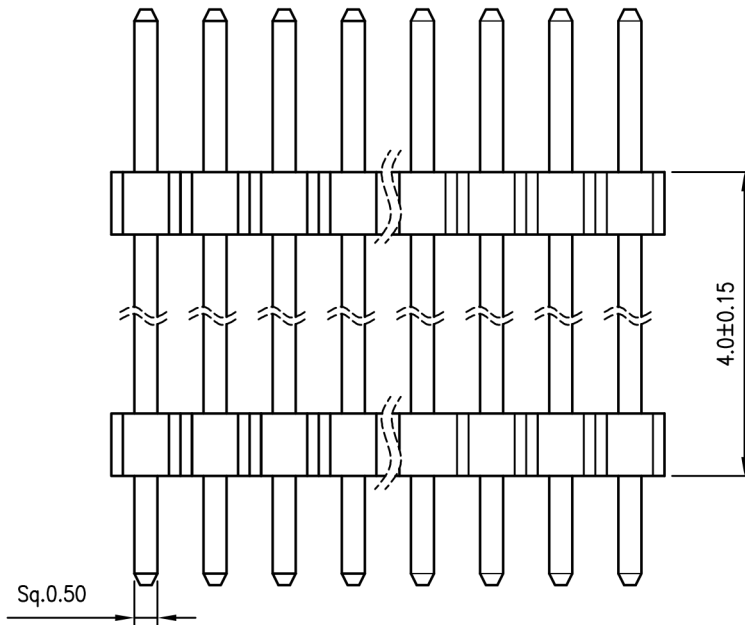

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE ±0.05

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in