



**DESCRIPTION** : 6.3x25mm GLASS CARTRIDGE FAST ACTING FUSE

**PART NO:** PXF In VK



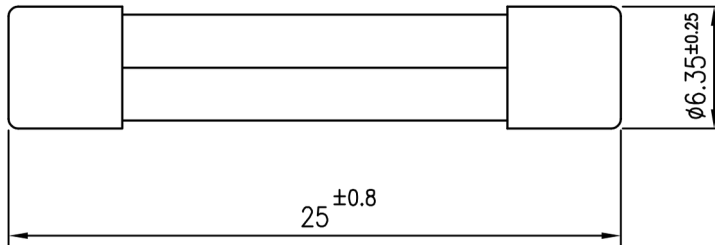
RATED VOLTAGE : 32 V  
CAP : BRASS, NICKEL PLATED  
BODY : GLASS

**MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-**

TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (32V), BREAKING CAPACITY (L) & COMPANY'S IDENTIFICATION

TIME CURRENT CHARACTERISTICS			
NOMINAL CURRENT	1.5 In	1.35 In	1.1 In
	MAX.	MAX.	MIN.
In	15 Sec.	180 Sec.	2 Hour

**DESCRIPTION :** 6.3x25mm GLASS CARTRIDGE FAST ACTING FUSE

**PART NO:** PXF In VK


NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)
0.5 A	200
1 A	200
2 A	200
4 A	200
5 A	200
6 A	200
7 A	200
10 A	200
15 A	200
20 A	200

Projection:


 Scale: **NTS**

 Sht. Size: **A4**

 Gen. Tol.: ±0.1mm  
 ±0.2°

 ALL DIMENSIONS ARE IN MM.  
 IF UNLESS OTHERWISE SPECIFIED.