

DESCRIPTION : 6.3x30mm GLASS CARTRIDGE  
FAST ACTING FUSE

PART NO:PXF IN VU



RATED VOLTAGE : 32 V  
CAP : BRASS, NICKEL PLATED  
BODY : GLASS


**MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-**

TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (32V), BREAKING CAPACITY (L) & COMPANY'S IDENTIFICATION


TIME CURRENT CHARACTERISTICS			
NOMINAL CURRENT	1.5 In	1.35 In	1.1 In
	MAX.	MAX.	MIN.
In	15 Sec.	180 Sec.	2 Hour

**DESCRIPTION** : 6.3x30mm GLASS CARTRIDGE  
FAST ACTING FUSE

**PART NO:** PXF In VU

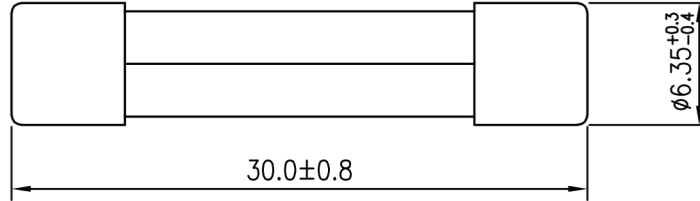

SL.NO	PEPL PART NUMBER	NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)
1	PXF 1A VU	1A	200
2	PXF 5A VU	5A	200
3	PXF 7A VU	7A	200
4	PXF 7.5A VU	7.5A	200
5	PXF 8A VU	8A	200
6	PXF 10A VU	10A	200
7	PXF 15A VU	15A	200
8	PXF 20A VU	20A	200

Projection:  


Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.: ±0.1mm  
±0.2°

ALL DIMENSIONS ARE IN MM.  
IF UNLESS OTHERWISE SPECIFIED.