




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.00 mm FEMALE HEADER SINGLE ROW, STRAIGHT

PART NO: P9441-XXX121

XXX=NO. OF CONTACTS(2-50)

RoHS

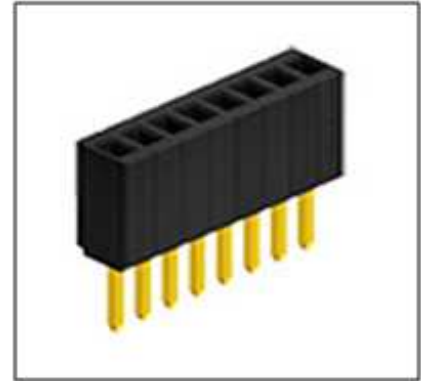

PHYSICAL

INSULATION

MATERIAL : THERMOPLASTIC
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : COPPER ALLOY
SOLDER TAILS : GOLD PLATED
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 1A
INSULATION RESISTANCE : 5000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC
CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40° TO +105°C
PROCESS RATING : 180°C FOR 5SEC




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.00 mm FEMALE HEADER SINGLE ROW, STRAIGHT

PART NO: P9441-XXX121

XXX=NO. OF CONTACTS(2-50)

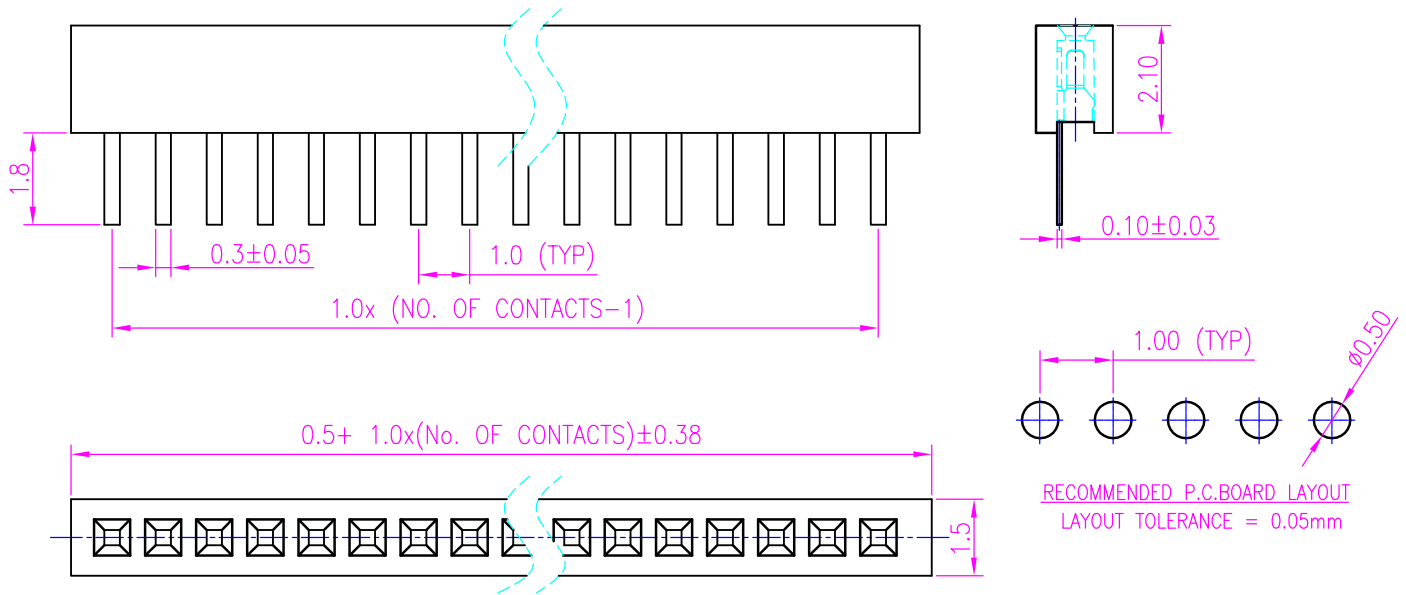

ORDERING INFORMATION

P9441-XXX121

NO OF CONTACTS
(2-50)

MOQ- ----

SPQ- ----

A	ORIGINAL	CHAITRA	03.10.2007		
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.20	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.