


DESCRIPTION :2.03mm VERTICAL JACK TIP
(TEST POINT WITHOUT KNURLING)

PART NO: P8022-2X-2X
1st X=TYPE OF COLOR
2nd X=TYPE OF PLATING

RoHS

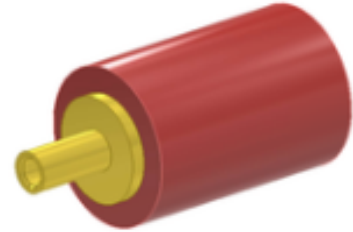

PHYSICAL

MATERIAL
INSULATOR BODY : GLASS FILLED NYLON
CONTACT : PHOSPHOR BRONZE
FINISH : REFER TABLE
PACKAGING TYPE : BULK PACKING

ELECTRICAL

CONTACT RESISTANCE : 5m OHMS MAX
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 2500V RMS
VOLTAGE RATING : 600V
CURRENT RATING : 4A

MECHANICAL DATA

INSERTION FORCE : 2.2kg MAX
EXTRACTION FORCE : 0.18kg MIN


ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +85°C



DESCRIPTION :2.03mm VERTICAL JACK TIP
(TEST POINT WITHOUT KNURLING)

PART NO:P8022-2X-2X
1st X=TYPE OF COLOR
2nd X=TYPE OF PLATING

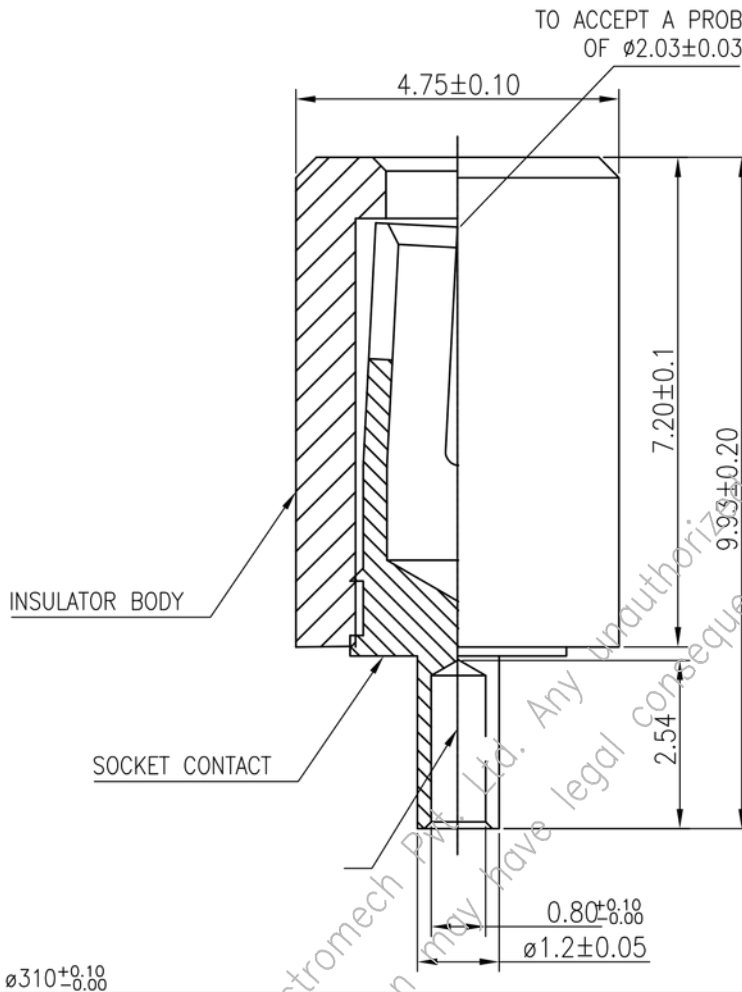

MOQ-2500 MIN
SPQ-2500 PER PACK


ORDERING INFORMATION

P8022-2X-2X

TYPE OF COLOR	
BLACK	0
RED	2
GREEN	5

PLATING	
Ag 5 μ	1
Ni5 Au0.2 μ	2
Ni2 Au0.5 μ	3
Ni2 Au0.75 μ	4
Sn 5 μ	5

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.35 mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.