



PROTECTRON®
ELECTROMECH (P) LTD

DESCRIPTION: 4.20mm PITCH MINI-FIT PLUG HOUSING,
DOUBLE ROW, RoHS

PART NO: P9049PH29-00-X

X=NO. OF WAYS(2-24)

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: NYLON 66
FLAMMABILITY	: UL94V-2
COLOR	: NATURAL COLOR

ELECTRICAL DATA

INSULATION RESISTANCE	: 1000M OHMS MIN
DIELECTRIC WITHSTANDING	: 1500V AC/MIN
CURRENT RATING	: 7A AC/DC
VOLTAGE RATING	: 600V AC/DC
CONTACT RESISTANCE	: 10m OHMS Max.

ENVIRONMENTAL DATA

TEMPERATURE RANGE	: -25° TO +85° C
-------------------	------------------

MATING PARTS	: P9049PT P9049S/R SERIES
--------------	------------------------------






PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION: 4.20mm PITCH MINI-FIT PLUG HOUSING,
DOUBLE ROW, RoHS

PART NO: P9049PH29-00-X

X=NO. OF WAYS(2-24)

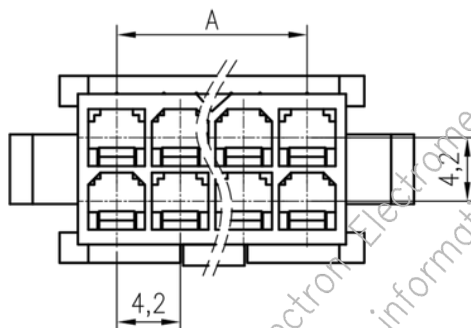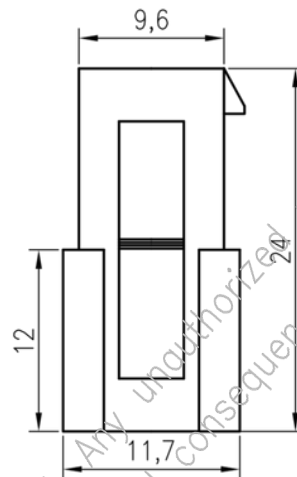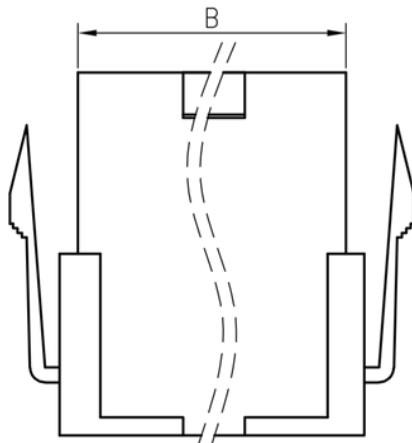

CIRCUITS	A	B	PART NUMBER
2	--	5.40	P9049PH29-00-2
4	4.20	9.60	P9049PH29-00-4
6	8.40	13.80	P9049PH29-00-6
8	12.60	18.00	P9049PH29-00-8
10	16.80	22.20	P9049PH29-00-A
12	21.00	26.40	P9049PH29-00-C
14	25.20	30.60	P9049PH29-00-E
16	29.40	34.80	P9049PH29-00-G
18	33.60	39.00	P9049PH29-00-I
20	37.80	43.20	P9049PH29-00-K
22	42.00	47.40	P9049PH29-00-M
24	46.20	51.60	P9049PH29-00-O

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.