




DESCRIPTION : BOX HEADER 2.0MM DUAL ROW, SURFACE MOUNT,
RoHS

PART NO: P9615-XX-81-1
XX = No. OF CONTACTS(10-68)

RoHS



PHYSICAL DATA

MATERIAL & FINISH:

INSULATOR BODY : BLACK POLYESTER UL94V-0
INSULATION : COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING : 1.5AMPS/CONTACT MAX.
INSULATION RESISTANCE : >1000M Ω AT V=100V
DIELECTRIC WITHSTANDING : 450V AC/MINUTE
CONTACT RESISTANCE : <20M Ω /CONTACT

MECHANICAL DATA

RETENTION FORCE : 0.8Kgf/CONTACT MIN.
SOLDERING TEMPERATURE : +260°C, 10s MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -55° TO +105°C







PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : BOX HEADER 2.0MM DUAL ROW, SURFACE MOUNT,
RoHS


PART NO: P9615-XX-81-1

XX = No. OF CONTACTS(10-68)

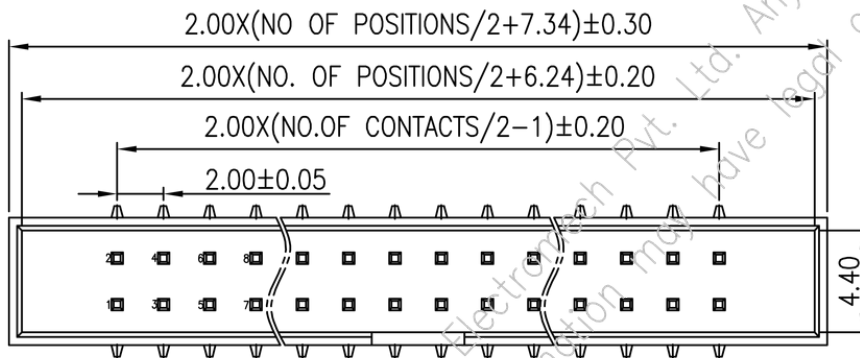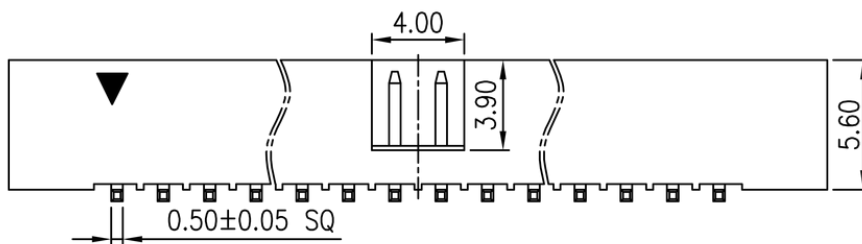

RECOMMENDED
PCB LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±0.2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.