



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.00mm pitch Pin Header Surface Mount
Double Row

PART NO: P9115-XX-99-1
XX=NO OF CONTACTS(4-80)

RoHS



PHYSICAL

INSULATION

MATERIAL : NYLON 6T
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : COPPER ALLOY
SOLDER TAILS : GOLD PLATED
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 1.5A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC/DC
CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C
PROCESS RATING : 180°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.00mm pitch Pin Header Surface Mount
Double Row

PART NO: P9115-XX-99-1
XX=NO OF CONTACTS(4-80)

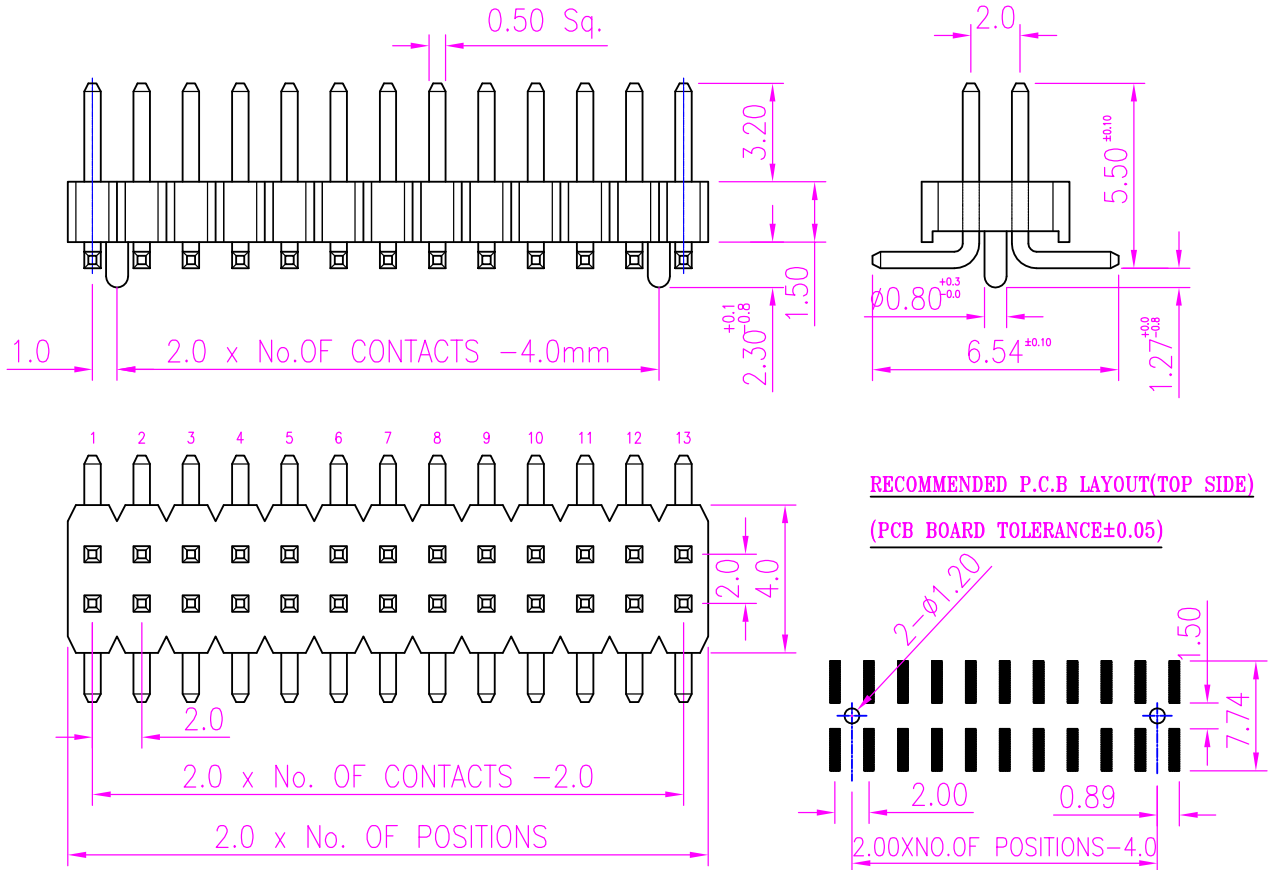

RECOMMENDED P.C.B LAYOUT(TOP SIDE)
(PCB BOARD TOLERANCE±0.05)

MATES WITH

P9413, P9414
P9415, P9417
P941D

ORDERING INFORMATION

P9115-XX-99-1

NO OF CONTACTS
(4-80)

MOQ- ----

SPQ- ----

FOR DIFFERENT PIN LENGTH AND PLATING, CONTACT FACTORY

A ORIGINAL	SAMSON	20.09.2002		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY APP'D BY



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.