



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 0.8mm PITCH PIN HEADER, SMD DOCKING TYPE,  
WITH ALIGNMENT

PART NO: P9155-XXX83-1  
XXX=NO. OF CONTACTS(2-100)

RoHS



## PHYSICAL

### INSULATION

MATERIAL : NYLON-6T OR LCP  
FLAMMABILITY : UL94V-0  
COLOR : BLACK

### CONTACT

MATERIAL : PHOSPHOR BRONZE  
SOLDER TAILS : GOLD PLATED  
PACKAGING TYPE : TUBE/TRAY

## ELECTRICAL

CURRENT RATING : 0.5A  
INSULATION RESISTANCE : 1000M OHMS MIN  
DIELECTRIC WITHSTANDING : 500V AC/MIN  
CONTACT RESISTANCE : 40m OHMS MAX

## ENVIRONMENTAL DATA


TEMPERATURE RANGE : -20° TO +105°C



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 0.8mm PITCH PIN HEADER, SMD DOCKING TYPE, WITH ALIGNMENT

PART NO: P9155-XXX83-1  
XXX=NO. OF CONTACTS(2-100)

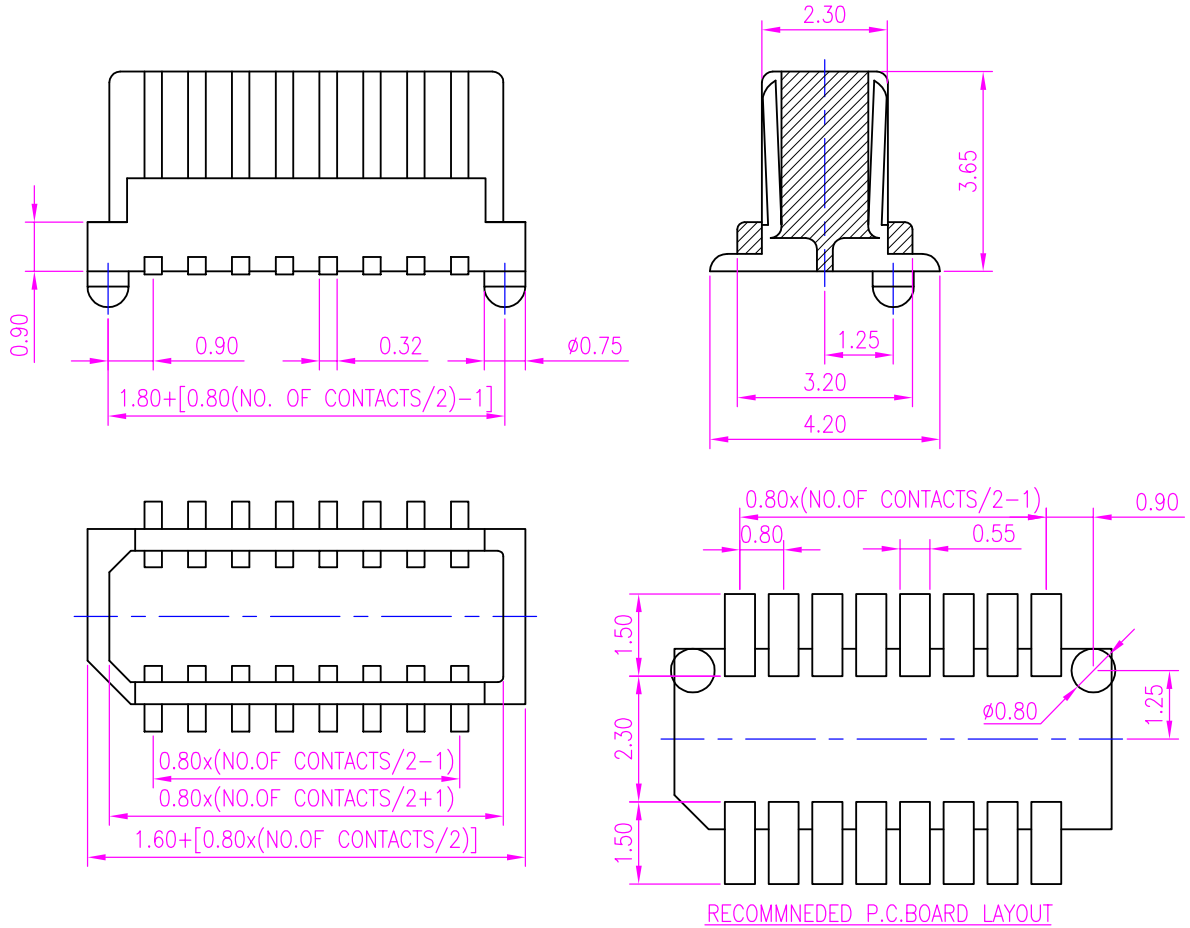

## ORDERING INFORMATION

P9155-XXX83-1

NO OF CONTACTS  
(2-100)

MOQ- ----

SPQ- ----

A	ORIGINAL	SACHIN	14.08.2004		
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.