



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27 IDC(FC) U TYPE N PIN

PART NO:P9433IDS-XXX-21
XXX=NO. OF CONTACTS

RoHS



PHYSICAL

CONTACT

MATERIAL : BRASS
PLATING : Au or Sn over Ni
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 1A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C
PROCESS RATING : 180°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27 IDC(FC) U TYPE N PIN

PART NO:P9433IDS-XXX-21
XXX=NO. OF CONTACTS

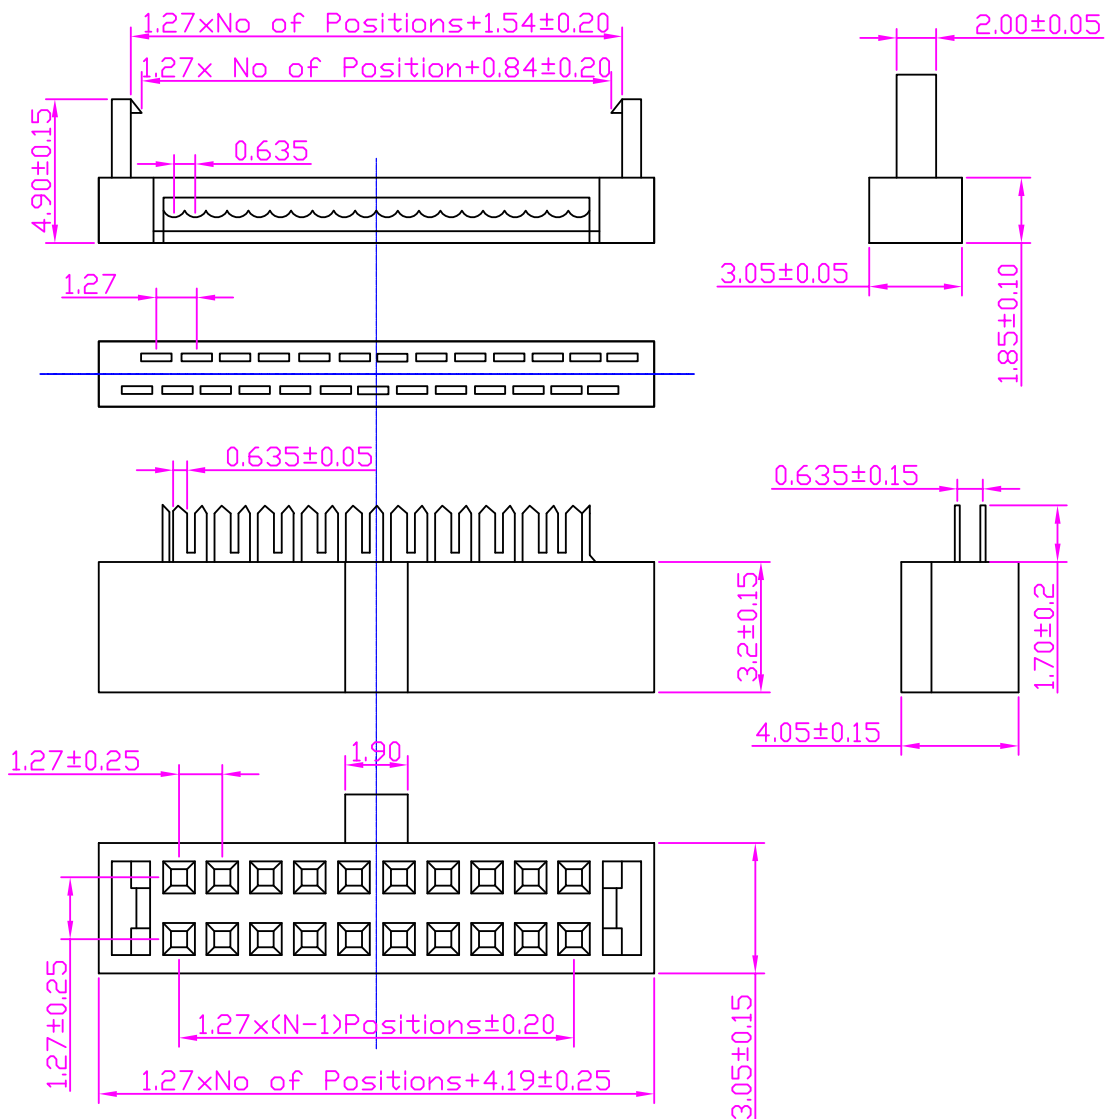

A1	ADDED 6PIN AND 8PIN.	SUNITA	23.04.2014		
A	ORIGINAL	ARUN	07.12.2004		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 0.1\text{mm}$ $\pm 0.2^\circ$	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27 IDC(FC) U TYPE N PIN

PART NO:P9433IDS-XXX-21
XXX=NO. OF CONTACTS

PINS	A	B	PINS	A	B
6P	8.00	2.54	30P	23.24	17.78
8P	9.27	3.81	34P	25.78	20.32
10P	10.54	5.08	40P	29.59	24.13
12P	11.81	6.35	44P	32.13	26.67
14P	13.08	7.62	50P	35.94	30.48
16P	8.00	8.89	60P	42.29	36.83
18P	8.00	10.16	64P	44.83	39.37
20P	8.00	11.43	68P	47.37	41.91
26P	8.00	15.24			

NO.	NAME	MATERIAL	FINISH	QTY
1	HOUSING	PBT+GF(UL94V-0)	BLACK	1
2	TERMINAL	PHOSPHOR BRONZE 0.15	GOLD PLATED OVER NICKEL	PINS
3	COVER	PBT+GF(UL94V-0)	BLACK	1

MATES WITH

P9633S,P9634S
P9635S

ORDERING INFORMATION

P9433IDS-XXX-21

NO OF CONTACTS

MOQ- ----

SPQ- ----