



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : BOX HEADER 2.0mm PITCH, STRAIGHT

PART NO:P9613-XX-81-1
XX=NO OF CONTACTS(6-68)

RoHS



PHYSICAL

INSULATION

MATERIAL	:	PBT
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK

CONTACT

MATERIAL	:	BRASS
CONTACT PLATING	:	GOLD PLATED
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	5000M OHMS MIN
CONTACT RESISTANCE	:	20m OHMS MAX
DIELECTRIC VOLTAGE	:	500V AC/MIN

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	180°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : BOX HEADER 2.0mm PITCH, STRAIGHT

PART NO:P9613-XX-81-1
XX=NO OF CONTACTS(6-68)

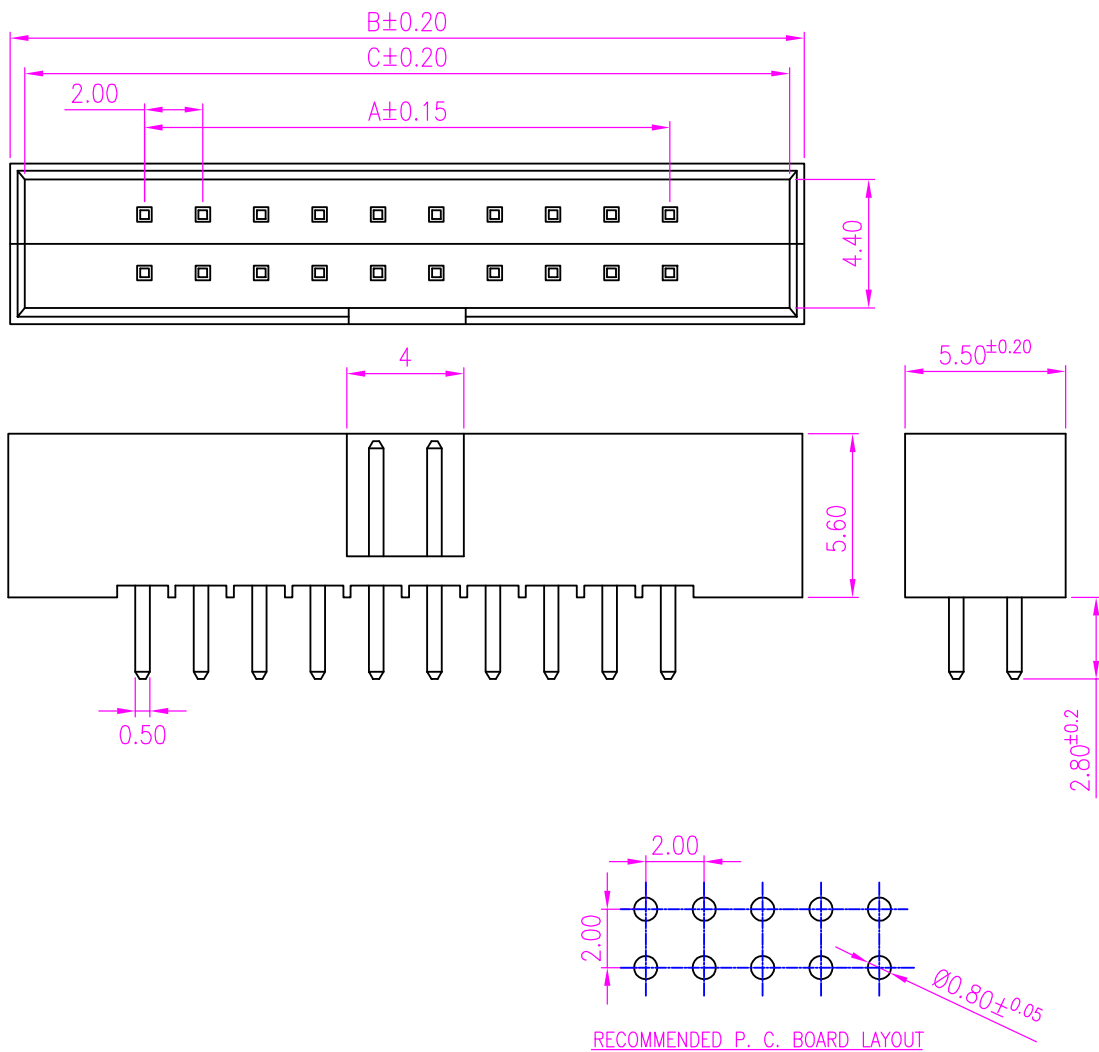

A	ORIGINAL		ARUN	24.12.2004			
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ± 0.25	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : BOX HEADER 2.0mm PITCH, STRAIGHT

PART NO:P9613-XX-81-1
XX=NO OF CONTACTS(6-68)

CIRCUITS	DIMENSIONS			CIRCUITS	DIMENSIONS		
	A	C	B		A	C	B
08	6.00	14.20	15.20	30	28.00	36.00	37.10
10	8.00	16.00	17.10	32	30.00	38.00	39.10
12	10.00	18.00	19.10	34	32.00	40.00	41.10
14	12.00	20.00	21.10	40	38.00	46.00	47.00
16	14.00	22.00	23.10	44	42.00	50.00	51.00
20	18.00	26.00	27.10	50	48.00	56.00	57.10
24	22.00	30.00	31.10	60	58.00	66.00	67.10
26	24.00	32.00	33.10	64	62.00	70.00	71.10
				68	66.00	74.00	75.10

MATES WITH

P9713,P9613
P9614

ORDERING INFORMATION

P9613-XX-81-1

NO OF CONTACTS
(6-68)

MOQ- ----

SPQ- ----