




DESCRIPTION :2.03mm VERTICAL JACK TIP
(TEST POINT WITH KNURLING)

PART NO:P8021-2X-2X
1st X=TYPE OF COLOR
2nd X=TYPE OF PLATING

RoHS



PHYSICAL

MATERIAL

INSULATOR BODY

: GLASS FILLED NYLON

CONTACT

: PHOSPHOR BRONZE

FINISH

: REFER TABLE

PACKAGING TYPE

: BULK PACKING

ELECTRICAL

CONTACT RESISTANCE

: 5m OHMS MAX

INSULATION RESISTANCE

: 1000M OHMS MIN

DIELECTRIC WITHSTANDING

: 2500V RMS

VOLTAGE RATING

: 600V

CURRENT RATING

: 4A

MECHANICAL DATA

INSERTION FORCE

: 2.2kg MAX

EXTRACTION FORCE

: 0.18kg MIN

ENVIRONMENTAL DATA

TEMPERATURE RANGE


: -40°C TO +85°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION :2.03mm VERTICAL JACK TIP
(TEST POINT WITH KNURLING)

PART NO:P8021-2X-2X
1st X=TYPE OF COLOR
2nd X=TYPE OF PLATING

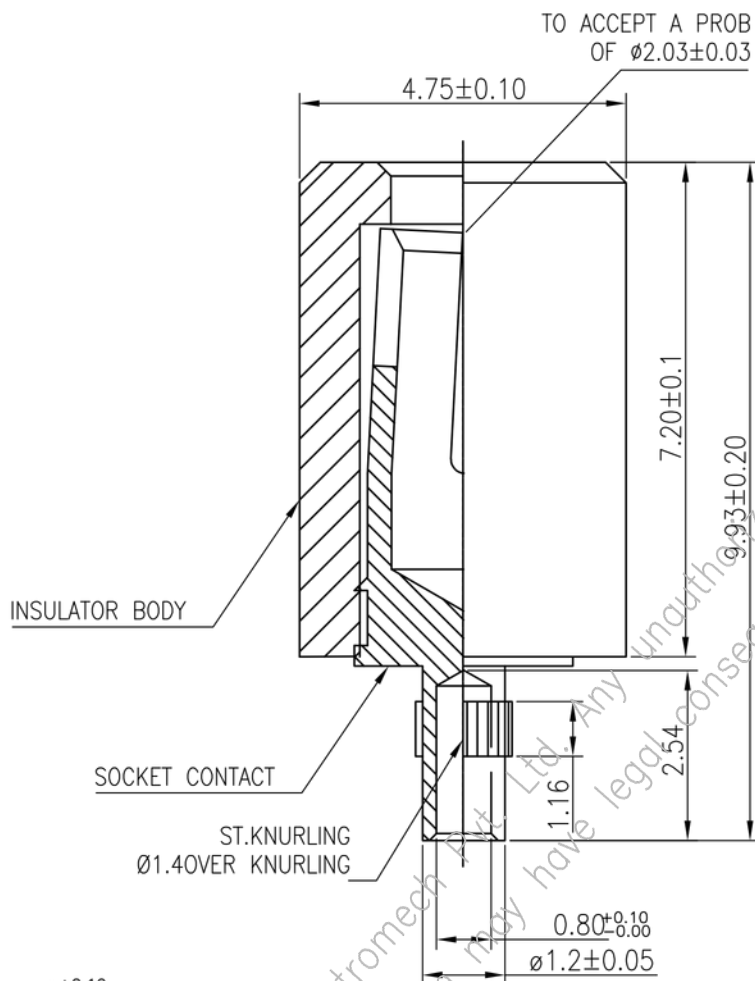

MOQ-2500 MIN

SPQ-2500 PER PACK

ORDERING INFORMATION

P8021-2X-2X

TYPE OF COLOR	
BLACK	0
RED	2
GREEN	5

PLATING	
Ag 5μ	1
Ni5 Au0.2μ	2
Ni2 Au0.5μ	3
Ni2 Au0.75μ	4
Sn 5μ	5

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.:±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>

protectron@protectron.in