


DESCRIPTION: 1.25mm PITCH WIRE TO BOARD CONNECTOR,
STRAIGHT, RoHS

PART NO: P9056S29-19-X
XX-NO OF CONTACTS

RoHS



PHYSICAL DATA

MATERIAL & FINISH

INSULATOR BODY	:	NYLON, UL94 V-0
CONTACTS	:	COPPER ALLOY, TIN PLATED

ELECTRICAL DATA

CURRENT RATING	:	1A AC/DC
VOLTAGE RATING	:	125V AC/DC
CONTACT RESISTANCE	:	20 mΩ MAX
INSULATOR RESISTANCE	:	100 MΩ MIN
WITHSTANDING VOLTAGE	:	250V AC/MINUTE

ENVIRONMENTAL DATA





TEMPERATURE RANGE	:	-25°C TO +85°C
-------------------	---	----------------



PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION: 1.25mm PITCH WIRE TO BOARD CONNECTOR,
STRAIGHT, RoHS

PART NO: P9056S29-19-X
XX-NO OF CONTACTS

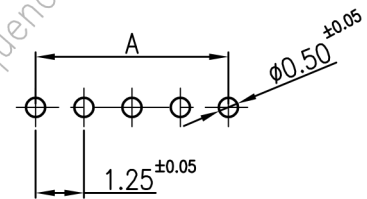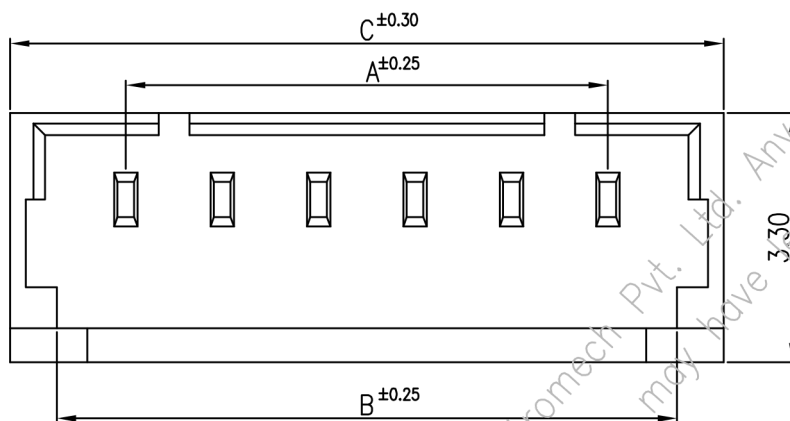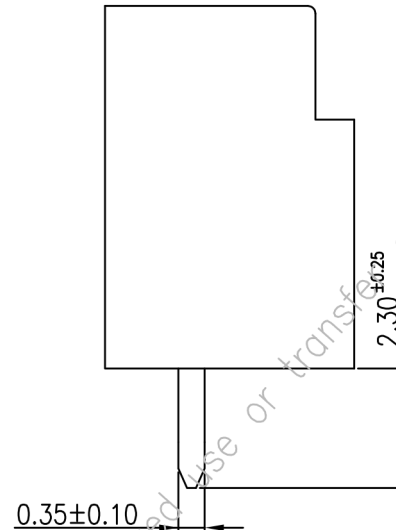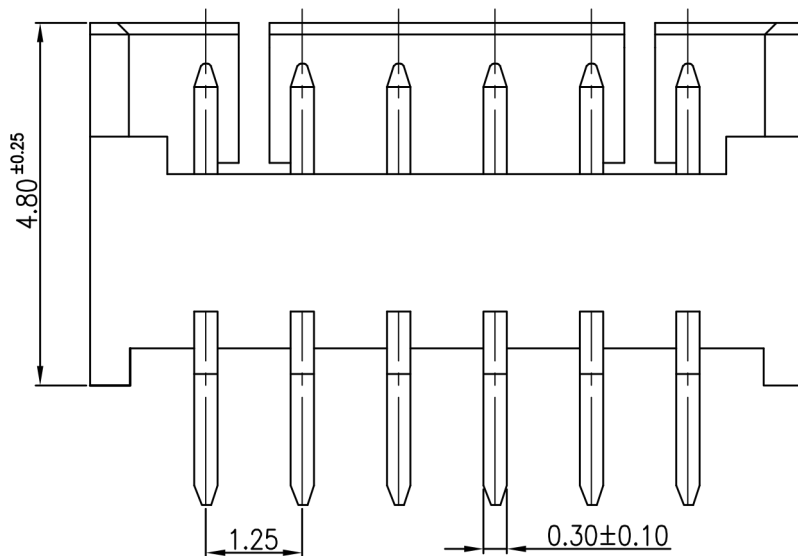


RECOMMENDED PCB LAYOUT

CIRCUIT	DIM.A(mm)	DIM.B(mm)	DIM.C(mm)
2	1.25	3.20	4.25
3	2.50	4.45	5.50
4	3.75	5.70	6.75
5	5.00	6.95	8.00
6	6.25	8.20	9.25
7	7.50	9.45	10.50
8	8.75	10.70	11.75
9	10.00	11.95	13.00
A=10	11.25	13.20	14.25
B=11	12.50	14.45	15.50
C=12	13.75	15.70	16.75
D=13	15.00	16.95	18.00
E=14	16.25	18.20	19.25
F=15	17.50	19.45	20.50

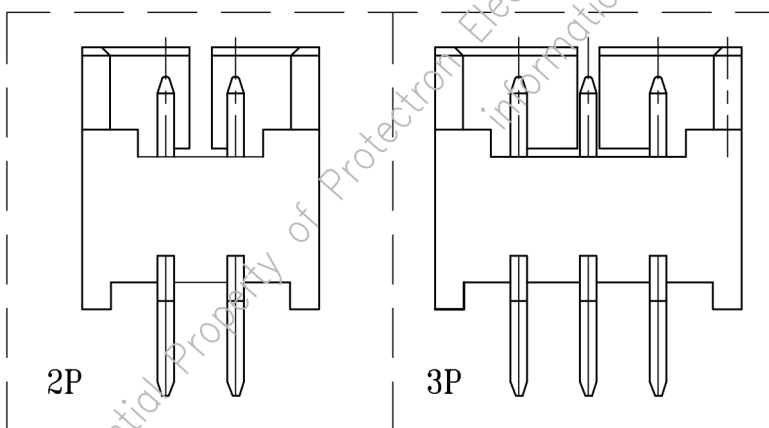

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>

protectron@protectron.in