




DESCRIPTION : PIN HEADER 2.54mm PITCH RIGHT ANGLE TYPE
WITH PIN 2 & 3KINK.

PART NO: P9102C04-JS-4K1

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: PBT 30% GF
FLAMMABILITY	: UL94V-0
COLOR	: BLACK
CONTACT	
MATERIAL	: COPPER ALLOY
FINISH	: 4 μ Sn OVER 1.25 μ Ni PLATING(PROCESS TOLERANCE $\pm$ 10%)
PACKING TYPE	: STANDARD PACKING

ELECTRICAL DATA

CURRENT RATING	: 3A
INSULATION RESISTANCE	: 1000M OHMS MIN
CONTACT RESISTANCE	: 20m OHMS MAX
VOLTAGE RATING	: 500V AC for 1minute

ENVIRONMENTAL DATA




TEMPERATURE RANGE	: -40°C TO +105°C
-------------------	-------------------




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER 2.54mm PITCH RIGHT ANGLE TYPE
WITH PIN 2 & 3 KINK.

PART NO: P9102C04-JS-4K1

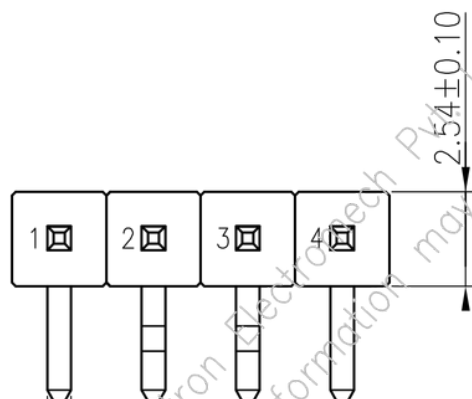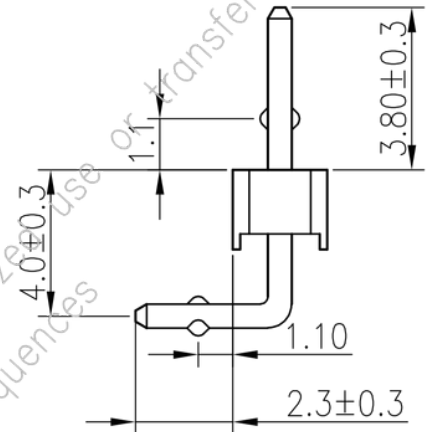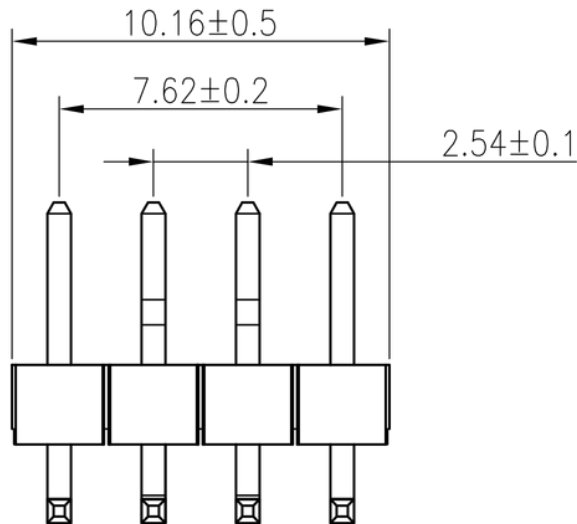


SQ 0.64±0.05

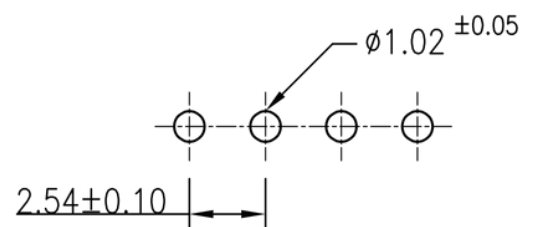

RECOMMENDED P.C.B. LAYOUT

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.