



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : RECEPTACLE HOUSING FOR 2.0mm PITCH
CONNECTOR (CRIMP TYPE)

PART NO: P9113H50-00XX
XX=NO. OF POSITIONS (02-80)

RoHS



PHYSICAL DATA

INSULATION

MATERIAL

: THERMOPLASTIC UL94V-2, BLACK COLOR

ELECTRICAL DATA

RATED CURRENT

:

1A

RATED VOLTAGE

:

125 V AC/DC

INSULATION RESISTANCE

:

5000M OHMS Min.

CONTACT RESISTANCE

:

20m OHMS Max.

DIELECTRIC VOLTAGE

:

500V AC / MINUTE

MATING CONNECTOR

CRIMP TERMINAL – P911XT SERIES

PIN HEADER – P9113 SERIES

ENVIRONMENTAL DATA

TEMPERATURE RANGE

:


-40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION : RECEPTACLE HOUSING FOR 2.0mm PITCH
CONNECTOR (CRIMP TYPE)

PART NO: P9113H50-00XX
XX=NO. OF POSITIONS (02-80)

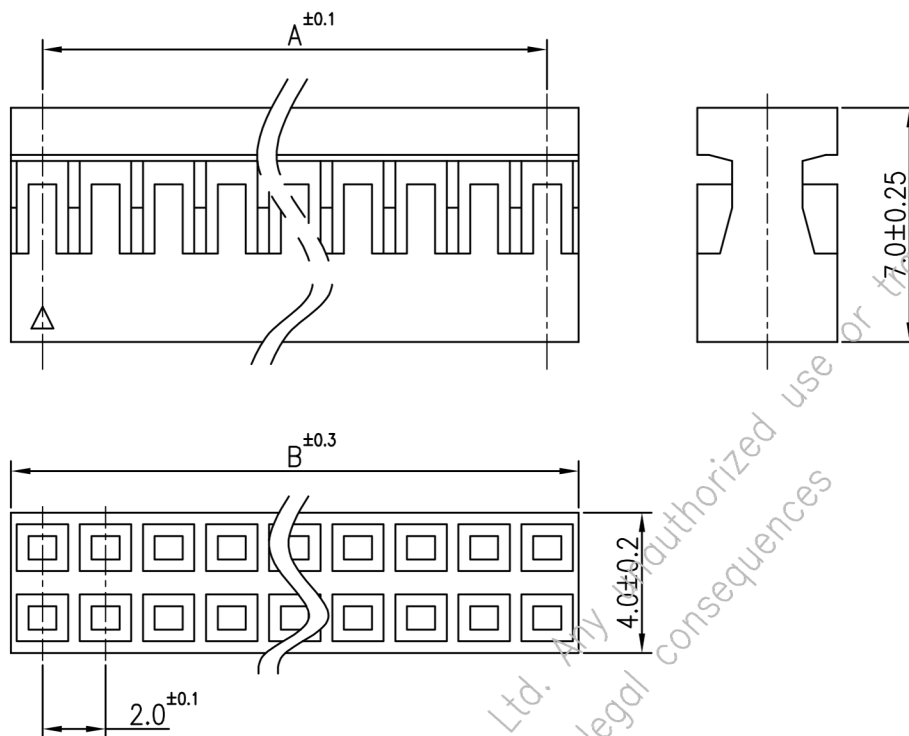

NO. OF WAYS	DIMENSION		NO. OF WAYS	DIMENSION	
	A	B		A	B
2	2.0	2.20	42	40.0	42.20
4	2.0	4.20	44	42.0	44.20
6	4.0	6.20	46	44.0	46.20
8	6.0	8.20	48	46.0	48.20
10	8.0	10.20	50	48.0	50.20
12	10.0	12.20	52	50.0	52.20
14	12.0	14.20	54	52.0	54.20
16	14.0	16.20	56	54.0	56.20
18	16.0	18.20	58	56.0	58.20
20	18.0	20.20	60	58.0	60.20
22	20.0	22.20	62	60.0	62.20
24	22.0	24.20	64	62.0	64.20
26	24.0	26.20	66	64.0	66.20
28	26.0	28.20	68	66.0	68.20
30	28.0	30.20	70	68.0	70.20
32	30.0	32.20	72	70.0	72.20
34	32.0	34.20	74	72.0	74.20
36	34.0	36.20	76	74.0	76.20
38	36.0	38.20	78	76.0	78.20
40	38.0	40.20	80	78.0	80.20

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.