




DESCRIPTION : FEMALE HEADER 1.27mm, SINGLE ROW,
STRAIGHT, RoHS COMPLIANT

PART NO: P9431-XXXX-2X

RoHS



PHYSICAL DATA

MATERIAL DATA:

INSULATOR BODY : THERMOPLASTIC, UL94V-0
CONTACT : PHOSPHOR BRONZE, GOLD PLATED

ELECTRICAL DATA

RATED CURRENT : 1A
INSULATION RESISTANCE : 1000M OHMS MIN
CONTACT RESISTANCE : 20m OHMS MAX
DIELECTRIC WITHSTANDING : 500V AC FOR ONE MINUTE

ENVIRONMENTAL DATA




TEMPERATURE RANGE : -40° TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 1.27mm, SINGLE ROW,
STRAIGHT, RoHS COMPLIANT

PART NO: P9431-XXXX-2X

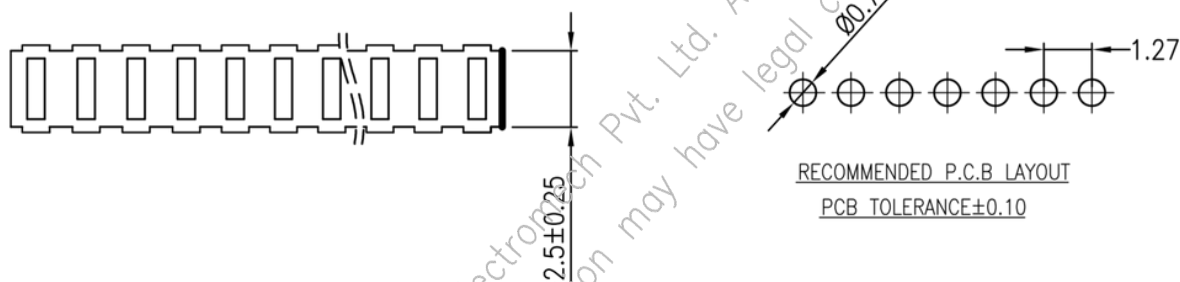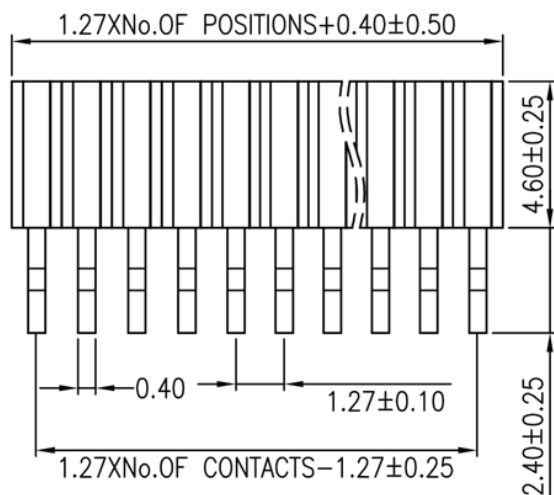

MATES WITH
P9131, P9132
P9136

NO.OF CONTACTS
(02-50)

ORDERING INFORMATION

P9431-XXXX-2X

	DIMENSION
1	1.50
2	2.40
3	3.0

	PLATING
1	GOLD FLASH
2	0.75μ GOLD PLATING
3	GOLD ON CONTACT & TIN ON SOLDER SIDE
4	5μ TIN PLATING



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.: ±0.5mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.