




DESCRIPTION : BOX HEADER 2.0MM DUAL ROW, SURFACE MOUNT,
RoHS

PART NO: P9615-XX-81-1

XX = No. OF CONTACTS(10-68)

RoHS

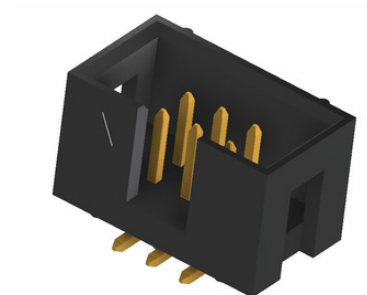

PHYSICAL DATA

MATERIAL & FINISH:

INSULATOR BODY	:	BLACK POLYESTER UL94V-0
INSULATION	:	COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING	:	1.5AMPS/CONTACT MAX.
INSULATION RESISTANCE	:	>1000M Ω AT V=100V
DIELECTRIC WITHSTANDING	:	450V AC/MINUTE
CONTACT RESISTANCE	:	<20M Ω /CONTACT

MECHANICAL DATA

RETENTION FORCE	:	0.8Kgf/CONTACT MIN.
SOLDERING TEMPERATURE	:	+260°C, 10s MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-40° TO +105°C
-------------------	---	----------------






PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION : BOX HEADER 2.0MM DUAL ROW, SURFACE MOUNT,
RoHS

PART NO: P9615-XX-81-1

XX = No. OF CONTACTS(10-68)

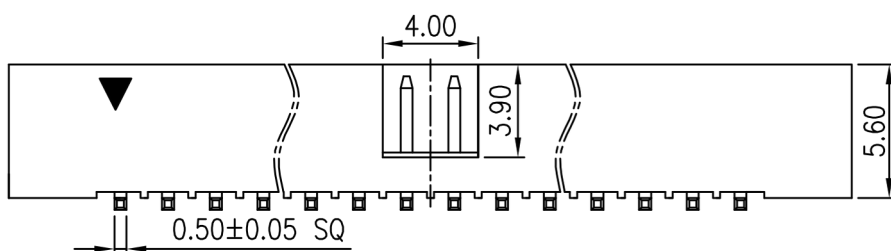

RECOMMENDED
PCB LAYOUT

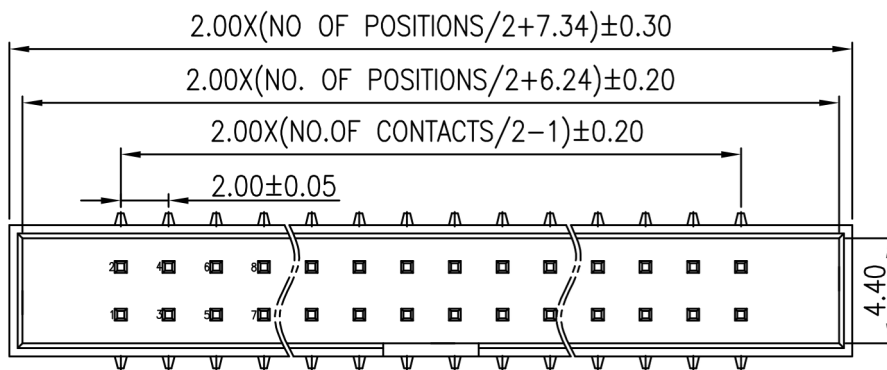

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±0.2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.