




**DESCRIPTION :** 1.27x1.27mm BOX HEADER, DUAL ROW  
RIGHT ANGLE,RoHS

**PART NO:** P9634-XXX-35-X

RoHS

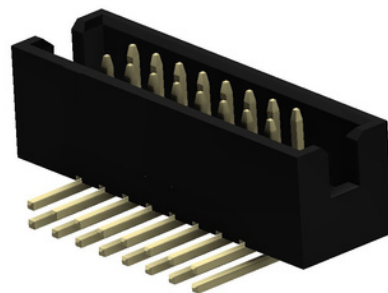

#### PHYSICAL DATA

|                  |   |                                      |
|------------------|---|--------------------------------------|
| INSULATOR BODY   | : | PA9T,UL94V-0, BLACK COLOR            |
| CONTACT MATERIAL | : | COPPER ALLOY, 0.75 $\mu$ GOLD PLATED |

#### ELECTRICAL DATA

|                         |   |                        |
|-------------------------|---|------------------------|
| CURRENT RATING          | : | 1A                     |
| CONTACT RESISTANCE      | : | 20m $\Omega$ Max.      |
| INSULATION RESISTANCE   | : | 1000M $\Omega$ Min.    |
| DIELECTRIC WITHSTANDING | : | 300V AC FOR ONE MINUTE |

#### ENVIRONMENTAL DATA





|                   |   |                 |
|-------------------|---|-----------------|
| TEMPERATURE RANGE | : | -55°C TO +105°C |
|-------------------|---|-----------------|



**PROTECTRON<sup>®</sup>**  
ELECTROMECH (P) LTD

**DESCRIPTION :** 1.27x1.27mm BOX HEADER, DUAL ROW  
RIGHT ANGLE,RoHS

**PART NO:** P9634-XXX-35-X

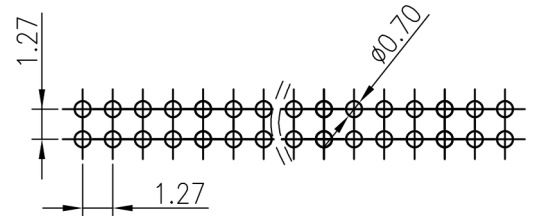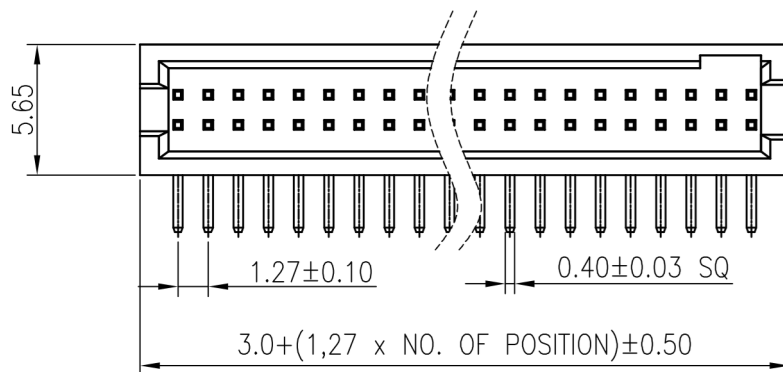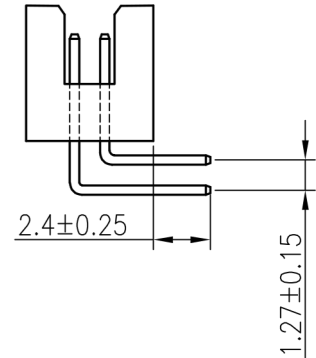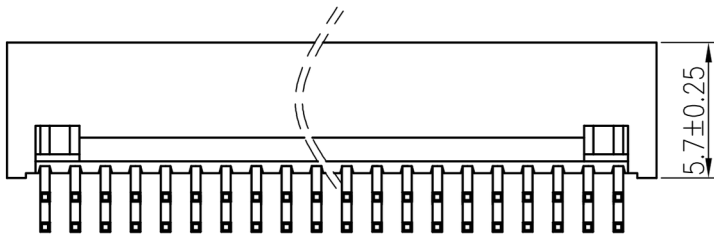

RECOMMENDED P.C.B LAYOUT  
(P.C.B BOARD TOLERANCE±0.05)

MATES WITH  
P9433, P9435

### ORDERING INFORMATION

P9634-~~XXX~~-35-1

NO.OF CONTACTS  
(10-100)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.50mm  
±2°

ALL DIMENSIONS ARE IN MM.  
IF UNLESS OTHERWISE SPECIFIED.

[www.protectron.in](http://www.protectron.in)

[protectron@protectron.in](mailto:protectron@protectron.in)